# Fireply X°

## SPECIFY WITH CONFIDENCE



Natural | Unique | Beautiful (& COMPLIANT!)

### Thickness (mm) 12 (Walls and ceilings) **2400 x 1200** (Butt joins) **18** (Walls – high impact) **2390 x 1190** (10mm Express joins) 25 **COLOUR SELECTION\*** Blackbutt Ash Natural Spotted Gum Ironbark Jarrah Aged Ebony • Faces and edges to match. Perforations receive overspray only. \* Images are indicative only. Always refer to physical samples. Samples • Backs sealed only (without stain). available on request. PERFORATION\*\* • Backs of perforated panels supplied with black scrim. 16 • Perforated panels supplied with nominal borders. Distance hole centres \*\*Perforation images are 8mm actual size 5mm actual size at a scale of 1:3 S: Square, D: Diamond Flat (no perforation) **8/16 D** (12mm only) 5/16S 5/16 D **8/16 S** (12mm only) 5/32 D 8/32S 8/32 D 5/32S FRAMING AND VOID Maximum void depth: 92mm

**PANEL DIMENSIONS** Tick boxes can be used as a quoting aid.

### FIXING METHOD

1. Fastmount™ (Secret fixing system)

2. Screw fixing





3. Screw fix perimeter with


construction adhesive

Standard PC Range recommended


### SUGGESTED FIXING PATTERN

Walls: 12mm, 18mm


#### 2400 x 1200mm

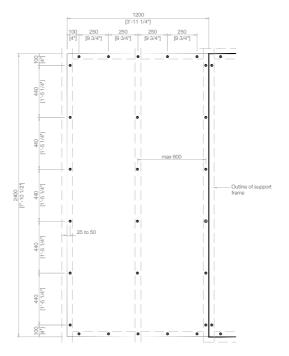


Ceilings: 12mm Walls: 25mm

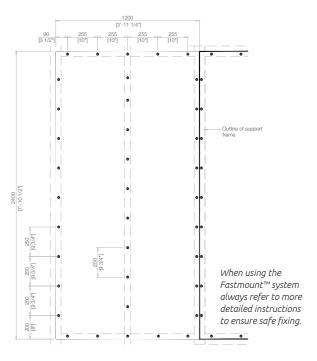

### 2390 x 1190mm



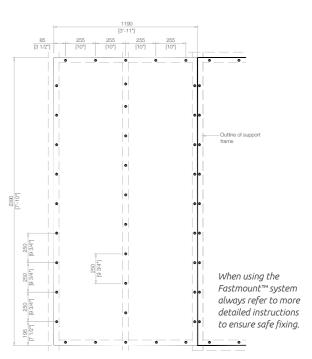

Contact our expert team for more information on our beautiful natural timber veneers and plywood products of exceptional quality.

hello@matildaveneer.com.au | + 61 7 5594 0655



