

REUSE  
PROTECT  
PRESERVE



Suitable for installation with:



Roller  
Shades




Panel Glide  
Shades



Vertical  
Shades



ROLLER SHADE SOLAR CONTROL FABRIC

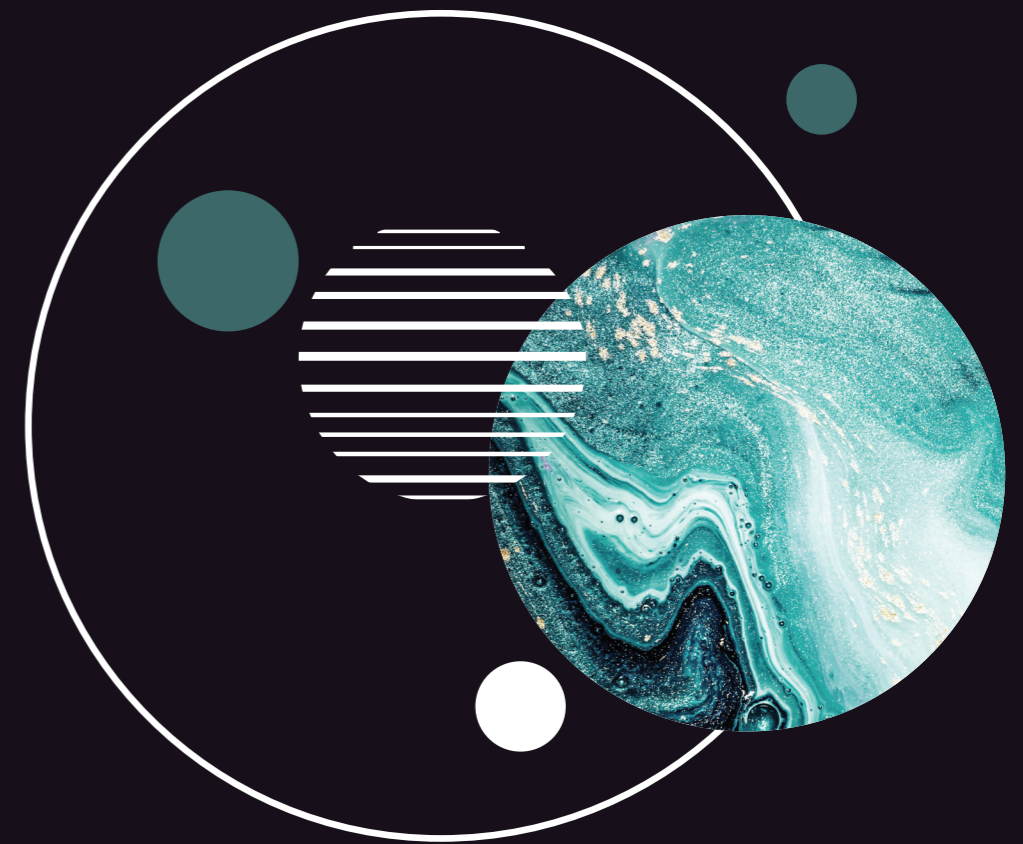

# CR BLOC

MADE FROM 100% POLYESTER TREVIRA CS  
100% PVC FREE  
RECYCLABLE

BLACKOUT

ROLLER SHADE SOLAR CONTROL FABRIC



# CR BLOC Blackout

- Openness Factor . **Of** •
- Ultraviolet Transmittance . **Tuv** •
- Light Transmittance . **Tv** •
- Light Reflectance . **Rv** •
- Solar Transmittance . **Ts** •
- Solar Reflectance . **Rs** •
- Solar Absorption . **As** •
- G Value . **G tot** •

0%  
openness factor

240 cm  
fabric width

0.4 mm  
thickness

350 g/m<sup>2</sup>  
weight

THIS FABRIC IS MADE FROM 100% POLYESTER TREVIRA CS

## FENESTRATION PROPERTIES

	OF	Tuv	Tv	Rv	Ts	Rs	As	G Value	
								C Glaze	D Glaze
<b>WHITE</b>	0%	0%	0%	80%	0%	67%	33%	-	-
<b>BEIGE</b>	0%	0%	0%	61%	0%	52%	48%	-	-
<b>GREY</b>	0%	0%	0%	37%	0%	33%	67%	-	-
<b>BRONZE</b>	0%	0%	0%	16%	0%	14%	86%	-	-
<b>BLACK</b>	0%	0%	0%	8%	0%	7%	93%	-	-

Data is current at time of printing. Please check website for most current information.

### Care Instructions

Handle fabric with care and wear clean gloves. Lightly dust regularly with clean feather duster. A hand-held vacuum with low suction may also be used. When vacuuming, avoid pulling or stretching the fabric. Leave the blind down until completely dry.

### Width

Maximum Roller Shade width: 2400 mm.

### Fabric Warranty

5 Years (internal use only).

### Railroad

This fabric can be railroaded



Backing Colour: Matching Tonal Colour



Order a memo sample: [info@climatereadyfabrics.com.au](mailto:info@climatereadyfabrics.com.au)