








No one builds a better fire

DESIGNED | to inspire

RED 40 See-Thru Balanced Flue Gas Fireplace

RED 40 ST-AU Specifications

MODEL			VIEWING AREA	mjh INPUT	k	Wh OUTPUT
RED 40 ST-N-AU		1080 × 432 36		7.9		
RED 40 ST-LP-AU			1080 x 432	34	7.5	
SIDE VIEW		FRONT VIEW		SIDE VIEW		
R P	S S		A	F G H		
Location	Millimetres				Location	Millimetres
Α	1321		TOP VIEW		K	1187
В	335	1992	м		L	178
С	273	•	MI		М	1273
D	1086	4	— N —→ı		N	637
Е	1222				0	455
F	533	1	9	F	Р	227
G	102				Q	95
Н	121	O T	 ((•))	The same	R	38
- 1	1090	Þ	\vdash		S	216
	435					

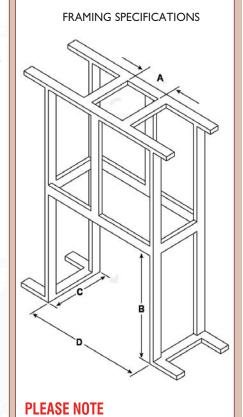

· Unit must be installed prior to plastering. · Frame opening is greater than plaster opening.

Dimensions above are in millimetres and for reference only. We recommend measuring individual units at installation stage.

Refer to installation manual for detailed specifications on installing this product. Heat & Glo reserves the right to update units and specifications periodically. The flame and ember appearance may vary based on the type of fuel burned and the venting configuration used. Photos in this brochure may vary in colour and dimension (size) from the actual product.

Balanced Flue Gas Fireplace

A completely sealed system, the Heat & Glo balanced flue gas fireplace draws 100% of combustion air from outdoors and exhausts all combustion byproducts back outside, with no effect on indoor air quality. Cold air drafts are also eliminated and heat output is maximised. Top or rear flueing technology, another Heat & Glo innovation, provides even greater placement flexibility.

IntelliFire Plus™ Ignition System

The IntelliFire Plus™ Ignition System is an "intelligent" control system providing energy conservation and the comfort of a roaring fire, all at your fingertips! IntelliFire Plus™ eliminates the need for a continuously burning pilot light, reducing gas consumption and lowering operating costs.

Please contact us at:

VIC: 03 9429 5573 • NSW: 02 9597 7222

QLD: 0734905500

WA: (Fireplace Corner) 08 9228 2600 SA: 08 8371 1222 • ACT: 02 6280 6021 Web: www.jetmaster.com.au

RED 40 ST-AU Features

Top or rear venting options provide installation flexibility

FLUE OPEN

255

HEIGHT

В

1190

DEPTH

С

430

WIDTH

D

1275

- Zero clearance provides ease of installation and costs savings
- IntelliFire Plus[™] ignition system
- Choice of fronts to complement the Crystal glass media
- Balanced flue technology provides a sealed combustion chamber, maintaining indoor air quality
- Selection of accent lighting options to enhance visual impact
- Optional Heat Zones (2 per unit) to maximise heat distribution
- 205mm top or rear flueing
- Approval No: GMK 10107

Media Options

The area around your flames can adopt many dramatic appearances. Create a 'fire & ice' effect with crystal glass media - enhanced by a range of amazing accent colour lighting options... OR enhance the visual impact by adding the distinctive look of ceramic pebbles to the display.











RED LED ILLUMINATION



