


| norament[®]
| stairtreads

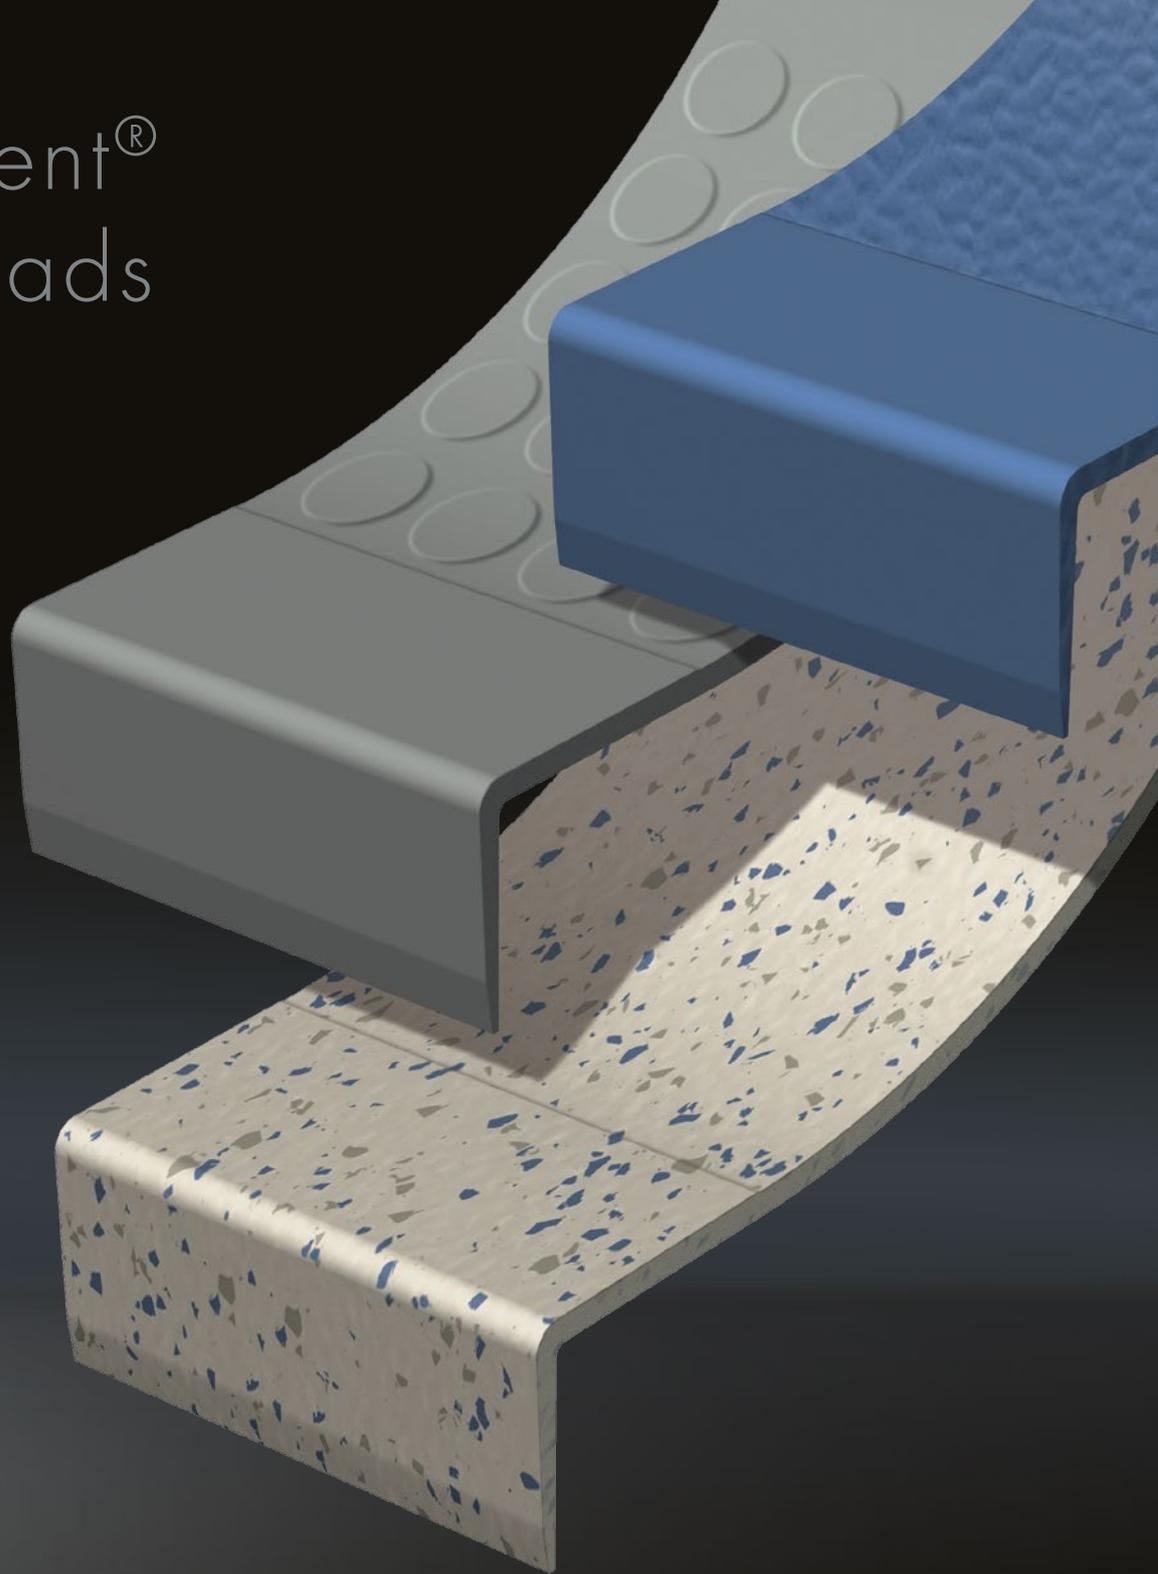

nora[®]

| norament[®] stairtreads

Your one-piece stair solution

norament[®] one-piece nosing-tread-riser stairtreads are a clean and enduring solution for your stairs. norament[®] stairtreads are cost-effective for both new and renovated buildings. No matter your application or facility, you will have a wide choice of floor covering options to complete your design by using norament[®] stairtreads.

norament[®] stairtreads are offered in both round and hammerblow surface, and are available in a wide range of colors with matching accessories to give you an array of design options for a cohesive look.

The stairtread is installed quickly, cleanly, and professionally as a single piece. All widths are possible, without visible seams or joint sealing. One of the many numerous advantages: the time consuming installation of stair nosings and separately trimmed coverings for single piece risers and treads now belong to the past. The subsurface can be virtually any material: wood, stone, screed, metal, or any of many other solid surfaces.

Low cost and environmentally compatible in equal measure, the adhesive innovation nora[®] Stepfix 240 proves ideal for the installation. With this double sided adhesive tape, installations, whether in new or renovated buildings, are up to five times faster than with conventional adhesive variants.

Benefits of norament[®] stairtreads include:

- Pre-sanded backs
- Adhered by using nora[®] Stepfix 240, an odorless, solvent-free adhesive tape
- Signal or safety stripes in yellow, grey, ultra grip, or luminescent
- Suitable also for stairwells in extremely high traffic areas

Besides its single piece stairtread, nora systems also offers individual solutions, e.g. combinations of floor coverings with stair nosings and stair angles. The range of high quality accessories also includes edges and corners and can be combined easily with other types of floor coverings.





Macquarie Bank, Sydney, Australia

| norament[®] stairtreads

Pre-shaped stair coverings consisting of stair nosing, riser and tread all in one piece for straight steps with right-angled edge. For extremely heavy traffic stairwell areas.

Stairtread norament[®] 926


One-coloured with classic round pastille, footfall sound absorption improvement of 12 dB

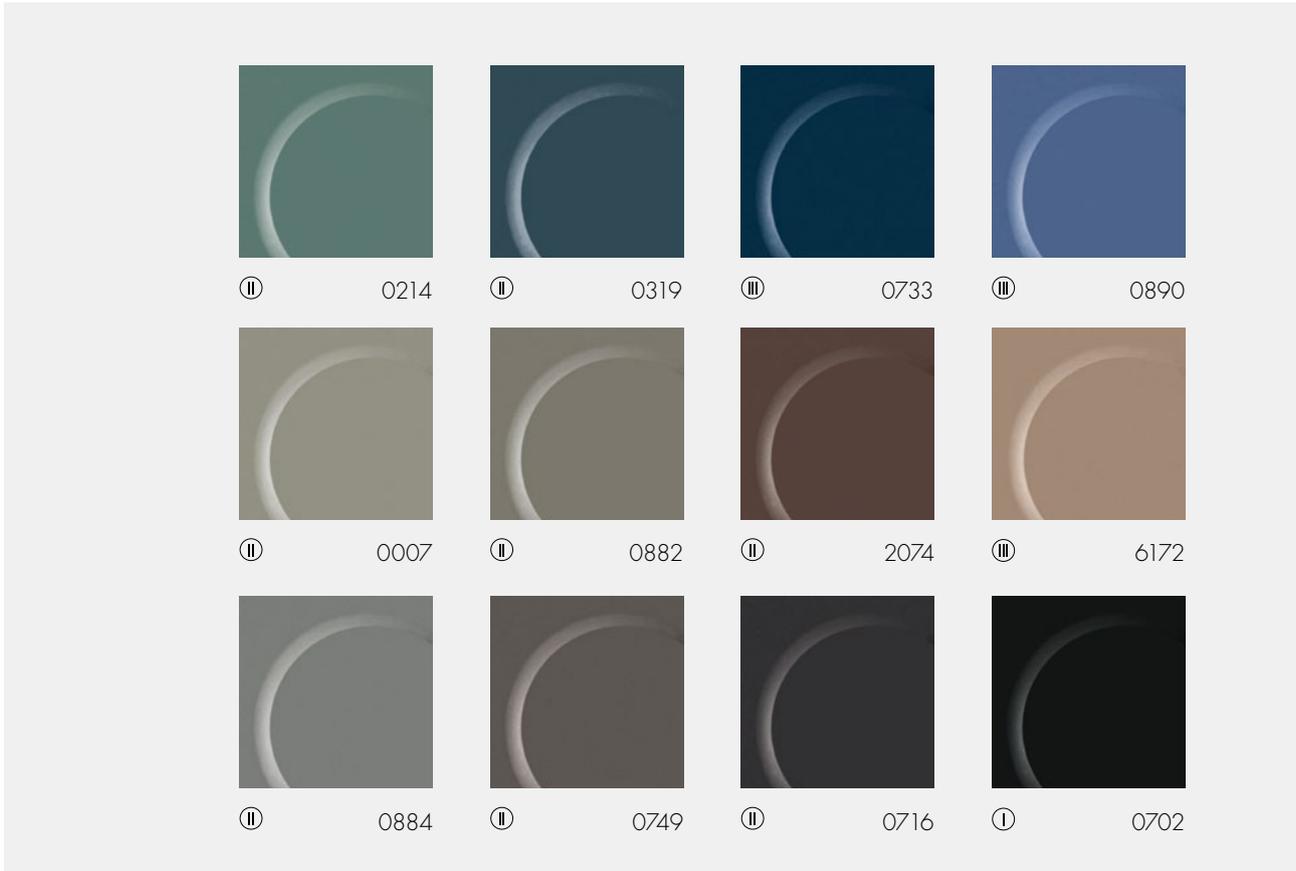

Stairtread norament[®] 926

12



- Art. 926/465 - width 1,285 mm
- Art. 926/466 - width 1,614 mm
- Art. 926/467 - width 2,004 mm

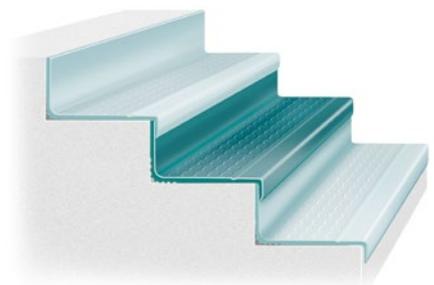

○ = Price category

Stairtread norament® 926 grano

Granular design rich in contrast with a hammerblow surface, footfall sound absorption improvement of 12 dB

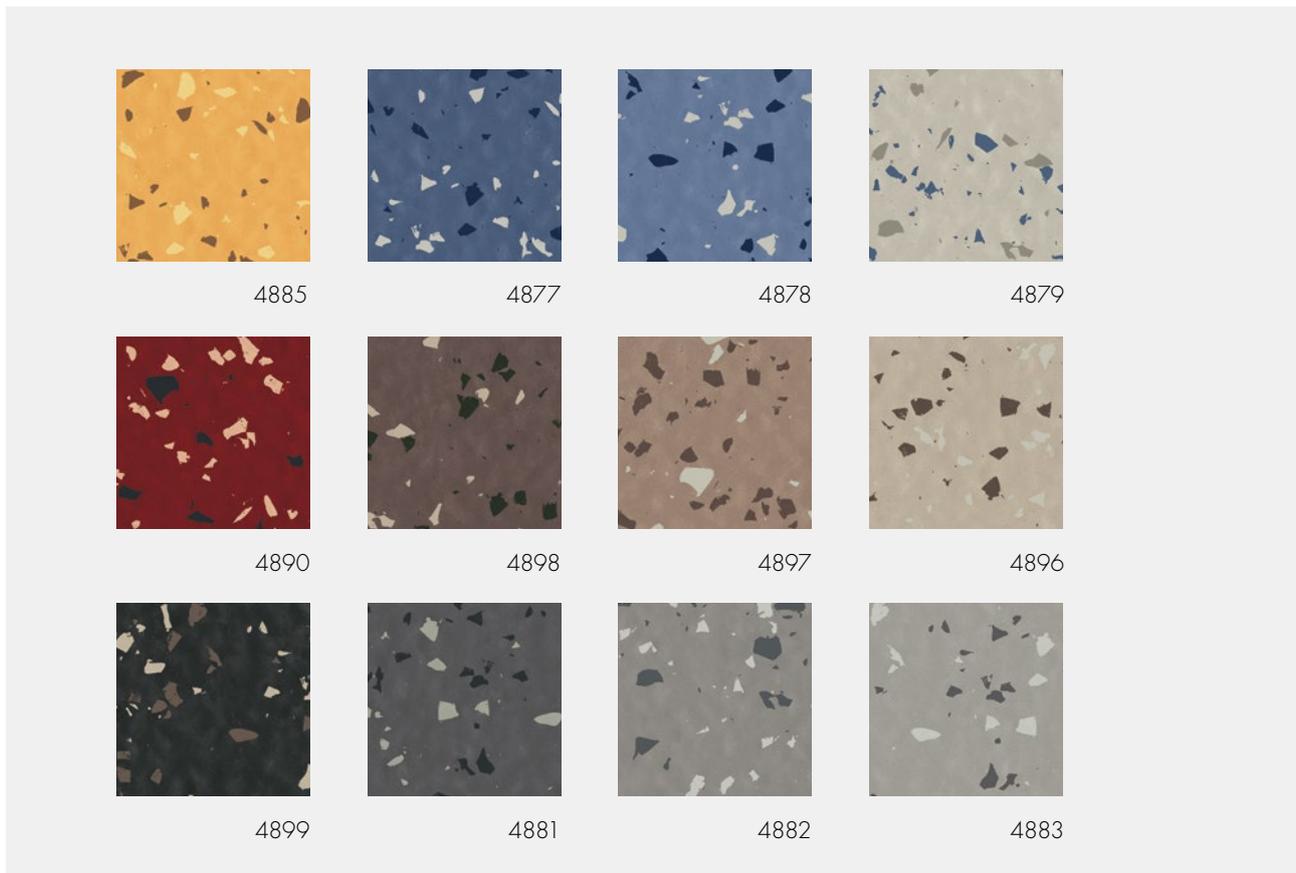


Stairtread norament® 926 grano

12

Art. 926 grano/479 - width 1,285 mm



Art. 926 grano/468 - width 1,614 mm

Art. 926 grano/469 - width 2,004 mm

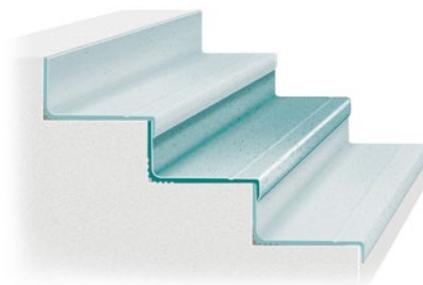

Stairtread norament® 926 satura

Tone-in-tone granular design with a hammerblow surface, footfall sound absorption improvement of 12 dB

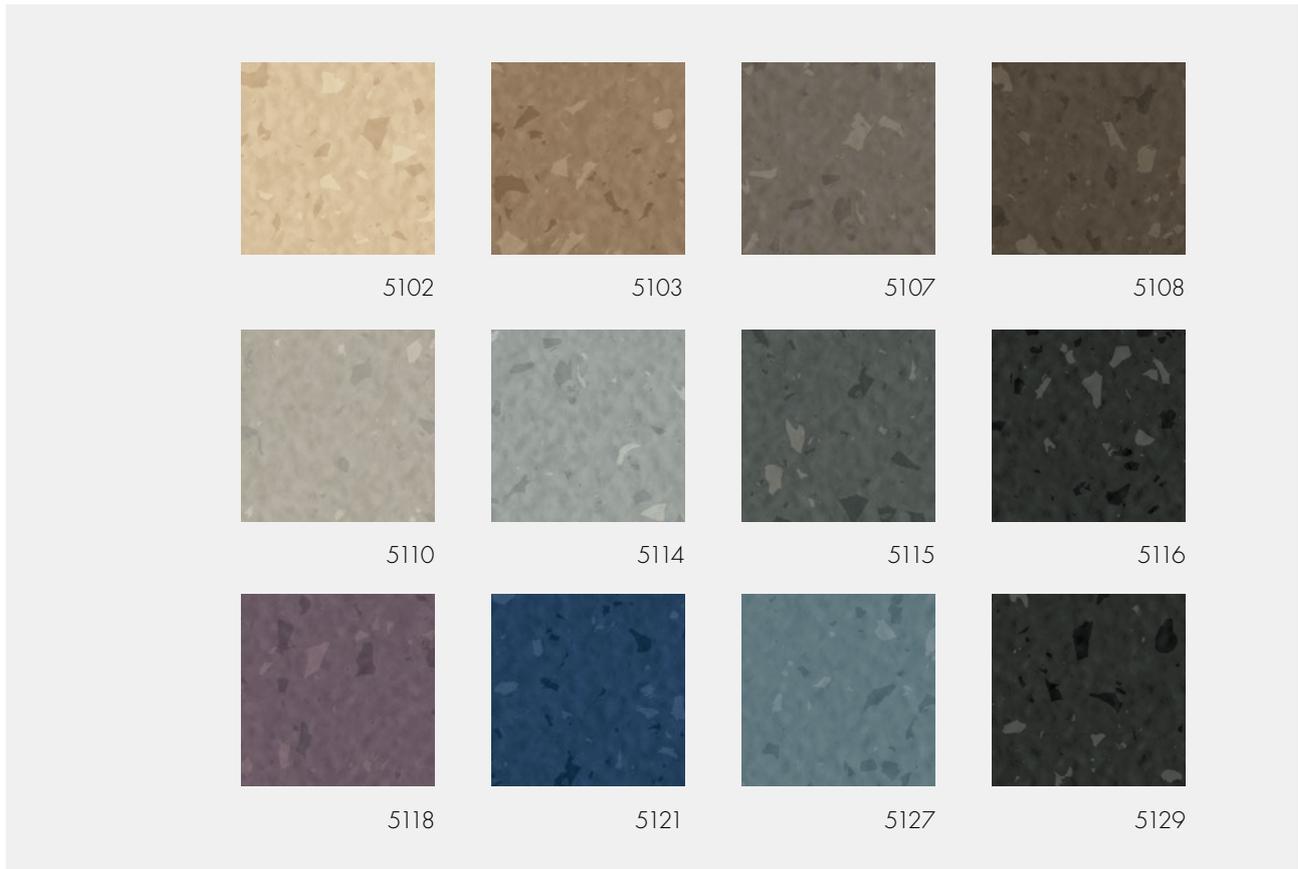


Stairtread norament® 926 satura

12

Art. 926 satura/479 - width 1,285 mm


Art. 926 satura/468 - width 1,614 mm

Art. 926 satura/469 - width 2,004 mm

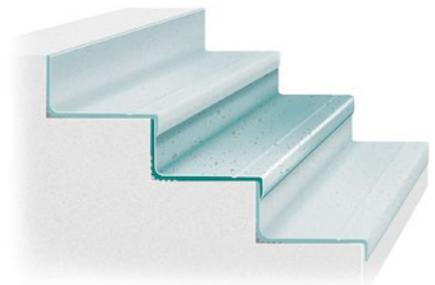


norament® stairtreads with signal or safety stripes

norament® stairtreads can be equipped with the following signal or safety stripes:

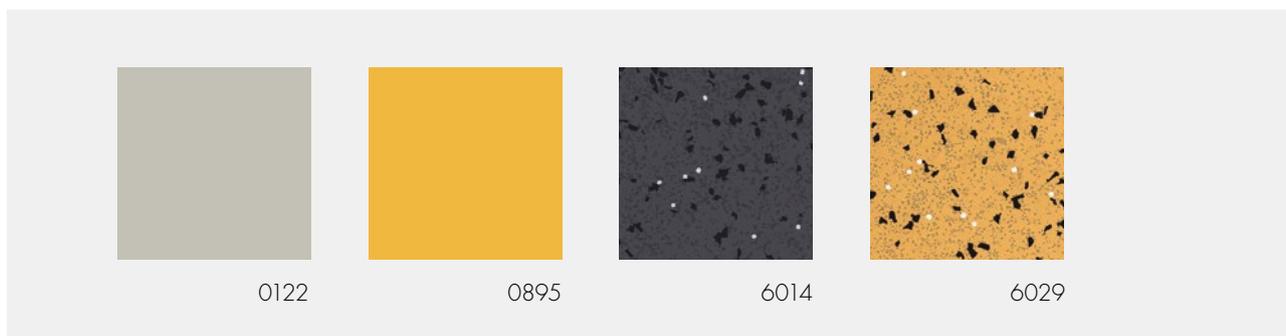


- Signal stripes yellow, phosphorescent according to DIN 67 510, in a width of 2 cm, integrated into the tread area of the stair nosing
- Signal stripes uni, in a width of 2 or 3 cm in the colours 0122, light grey, and 0895, signal yellow, integrated into the tread area and alternatively also in the vertical part of the stair nosing
- Safety stripes ultra grip for increased slip resistance, in a width of 2 or 3 cm in the colours 6029, yellow, and 6014, grey, integrated into the tread area and alternatively also in the vertical part of the stair nosing

Signal and safety stripes in other widths and colours are available on request.

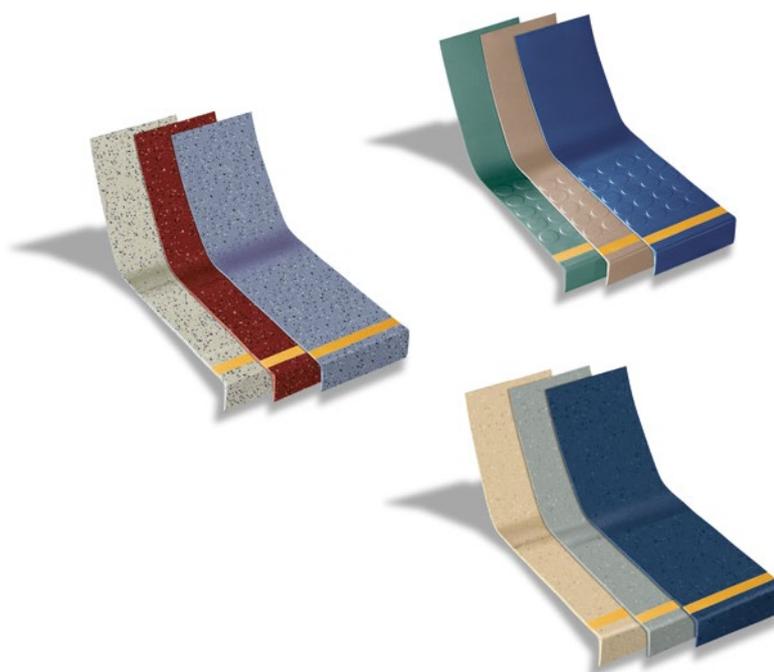

| nora[®] accessories for stairwell areas

Accessory range made of rubber matched to suit norament[®] and noraplan[®] floor coverings. Can also be used in combination with other types of floorings. nora[®] profiles are impact and shock-resistant, do not shrink, do not contain any plasticizers and retain their functional reliability long term.

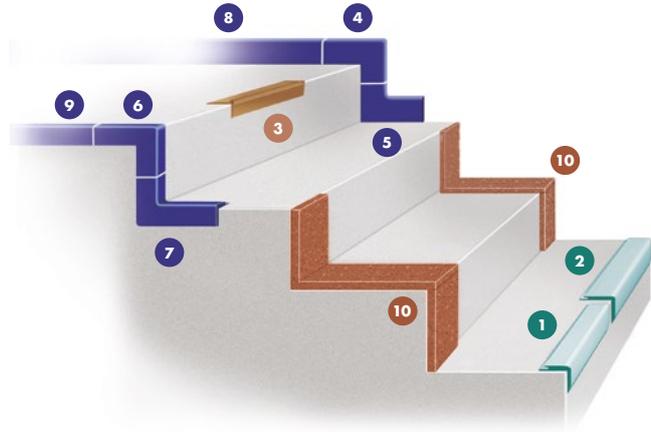

| nora[®] stair nosings

With plug-in lip for quick and easy installation on all types of staircases.

T 5049/T 5044



Minimum order quantity: 5 r.m.
Standard length: 2.5 r.m.
Delivery in 5 fixed lengths possible:
1.00/1.25/1.65/2.0/2.50 r.m.


0214	0884
0702	4877
0716	4885
0749	4890

TA 1203

Aluminium stair nosing for stairs made of norament[®] coverings
Delivery unit: 2.7 r.m.


1

Fixing with contact adhesive






2

Fixing with nora[®] stepfix 240 roll-type dry adhesive



3

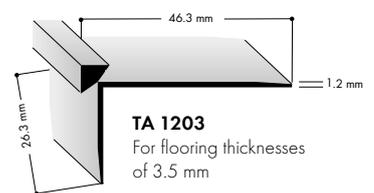

| nora® stair angles

For the smooth finishing of right-angled stairs to the wall and banister side.




**TW 7005 U/TW 7006 U/
TG 7003 U/TG 7004 U**

34
Delivery unit: pieces

TW 7006 U
(Outer angle)


4



Wall side
With same cross-section as
adjoining skirting S 1008 U

TW 7005 U
(Inner angle)

5

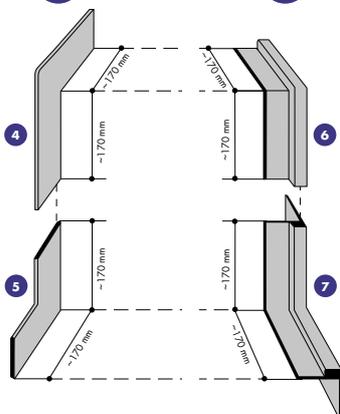


TG 7004 U
(Outer angle)

6

TG 7003 U
(Inner angle)

7



Banister side
With same cross-section
as stringer A 5013 U

| nora® skirting and stringer profile



S 1008 U/A 5013 U

34


S 1008 U

Multi-purpose skirting
Delivery unit: rolls of 10 r.m.
Connection profile for nora® stair
angles "TW"


A 5013 U

For landings and ramps
Delivery unit: in units of 2.5 r.m.
Connection profile for nora®
stair angles "TG"


8




9



0007
0214
0319
0702
0716
0733
0749
0882
0884
0890
1146
1150
2074
2930
4877
4878
4881
4885
4890
4896
4897
4898
5102
5103
5107
5108
5110
5114
5115
5116
5118
5121
5127
5129

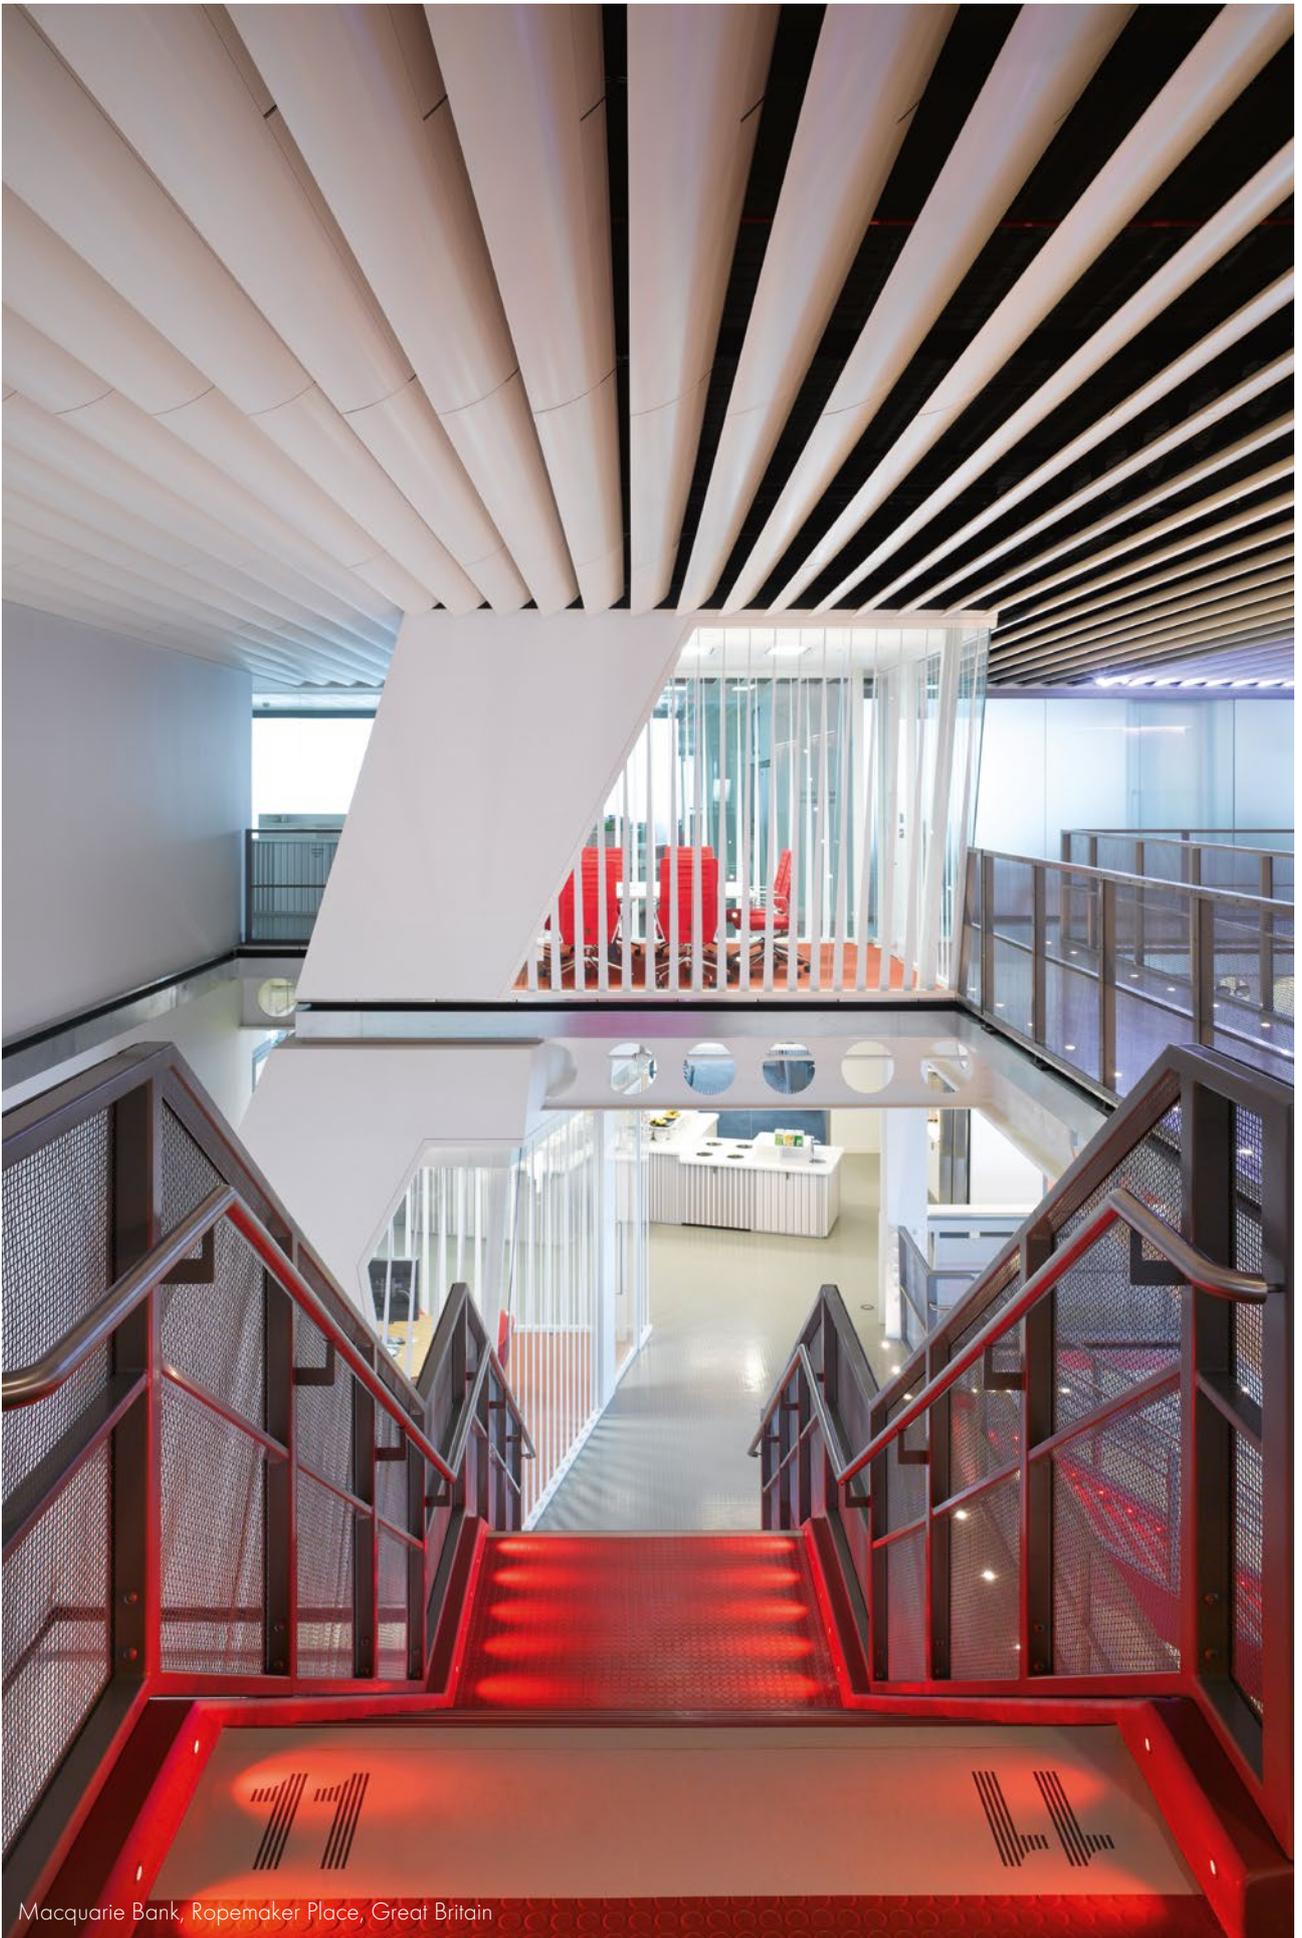

Macquarie Bank, Ropemaker Place, Great Britain

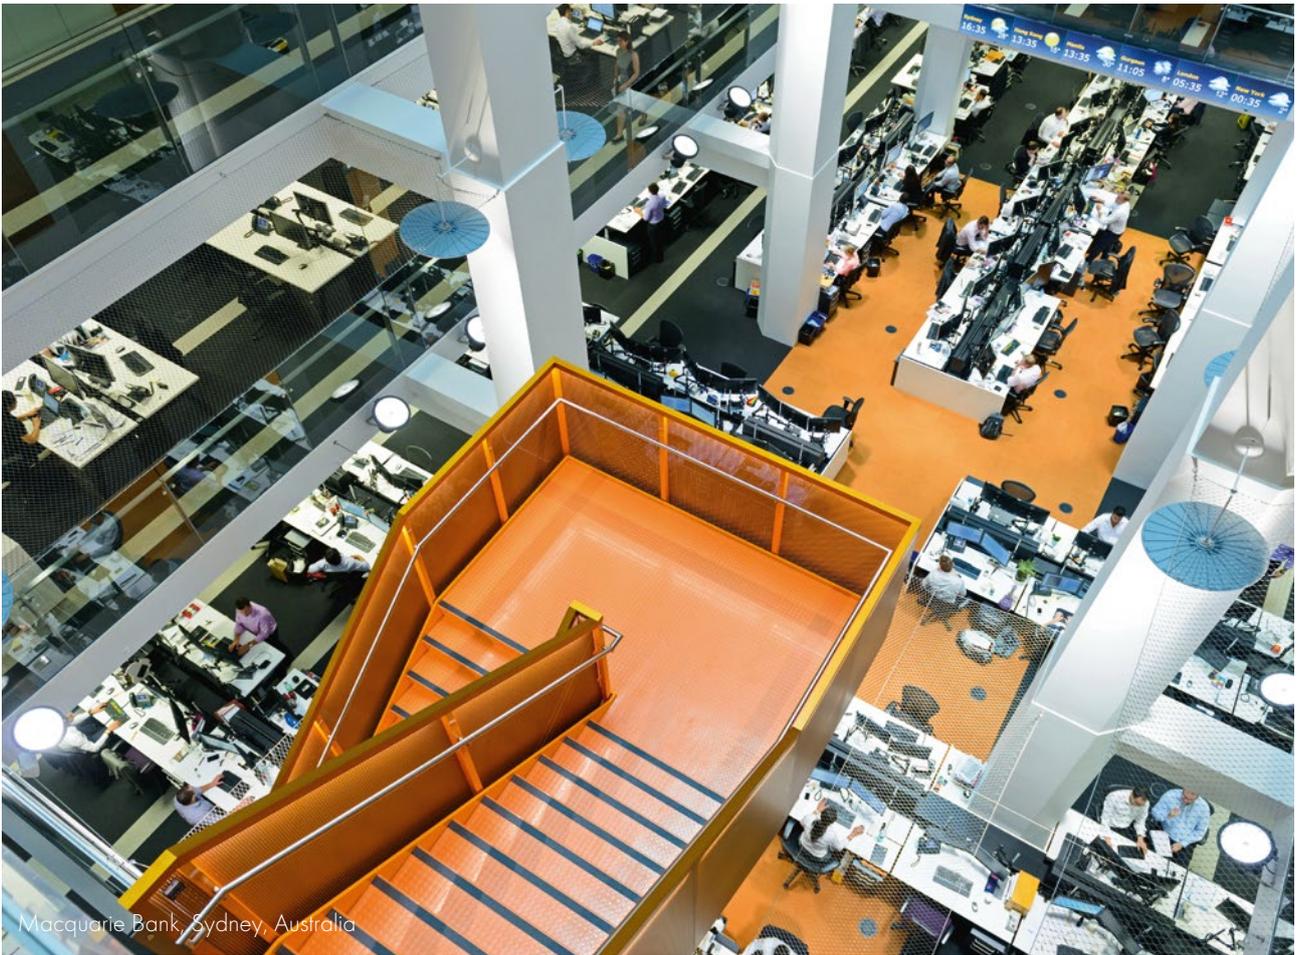

Macquarie Bank, Sydney, Australia



Hammersmith Academy, London, Great Britain

nora systems Shanghai Co. Ltd.

10 A/B, Long Life Building | 1566 Yan'an Road West | 200052 Shanghai, PR China

Tel.: +86 21 - 3226 0077 | Fax: +86 21 - 5258 1958

www.nora.com/cn

nora systems GmbH (DMCC Branch)

2008 HDS Business Centre | Jumeirah Lakes Towers | PO Box 478392 | Dubai, UAE

Tel.: +971 (4) 450 8175 | Fax: +971 (4) 450 8374

E-Mail: info@nora.com

www.nora.com/corp

nora flooring systems UK Ltd.

4-5 Allerton Road | Rugby CV23 0PA, Great Britain

Direct Dial Numbers: (01788) 513 160 - 513 169

Fax: (01788) 55 28 12

E-Mail: info-uk@nora.com

www.nora.com/uk

nora systems GmbH

Höhnerweg 2-4 | 69469 Weinheim, Germany

Tel.: +49 (0) 6201 - 80 66 33

E-Mail: info@nora.com

www.nora.com