

SOLIDAL® Perforated & Artwork



Using shadow and light, various Artwork design solutions can be achieved with SOLIDAL® Perforated

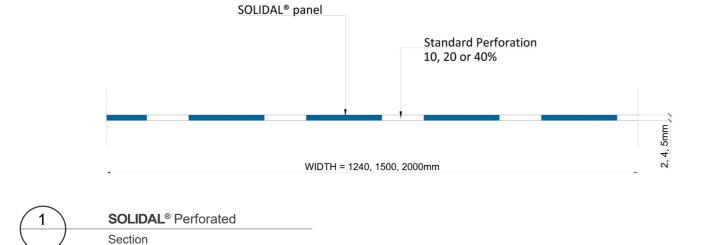

SOLIDAL® Head Office I 9A Davis Road I Wetherill Park, Sydney I NSW 2164, AustraliaE: info@solidalmetal.com I www.solidalmetal.com I PO Box 152 I Darlinghurst, Sydney I NSW 2010, Australia

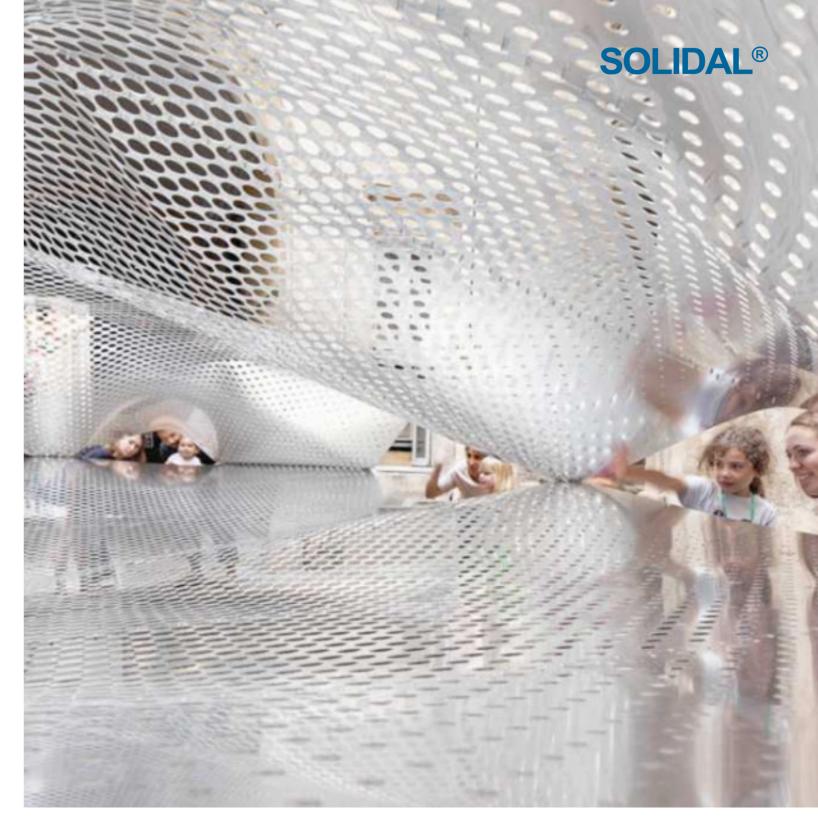

	SOLIDAL® Technical Sp
Panel Thickness (mm)	2mm, 2.5mm, 3mm, 4mm u
Available width (mm)	1240mm, 1500mm, 2000mm
Length (mm)	7000mm
	SOLIDAL® Perforated
Panel Thickness (mm)	3mm, 4mm, 5mm
Dimpled Percentage	10%, 20%, 40%
Diameter Options (mm)	15mm, 30mm, 60mm, 120m

2.5mm (Standard)

Depth of Dimple (mm)

pecification	
p to 6mm	
n	
am	