



# ECO-RAIN SURFACE MOUNTED SHOWER



**RBA8520-486 Eco-rain Surface Mounted Shower**

### Special Features

- Surface Mounted
- Factory Assembled for easy, low cost installation
- Owner Adjustable Flow Time
- Self Closing Valve
- Recessed Soap Dish
- Satin finished type 304 Stainless Steel Construction

### Hydraulic Requirements

Flow time : 1-50 seconds adjustable

Pressure: Max 500 kPa

Min 200 kPa

Shower head flow rate: 9.5 l/m

Watermark & WELS Approval

Single Temp, inlet connection 1/2" BSP


### Description

The eco-rain surface mounted shower provides an economic and space saving solution to showering facilities. Costly installation time is dramatically reduced as shower is predominantly assembled in the factory, requiring only one supply connection. The unit is supplied complete with pneumatic operated self closing valve and vandal resistant activation button. The shower rose is chrome plated heavy duty brass construction with adjustable, lockable spray pattern and fitted with a 9.5 l/m flow control.

### Installation

Fixing is with security type screws and security bit provided, wall anchors to be provided by others.

**Important:** Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

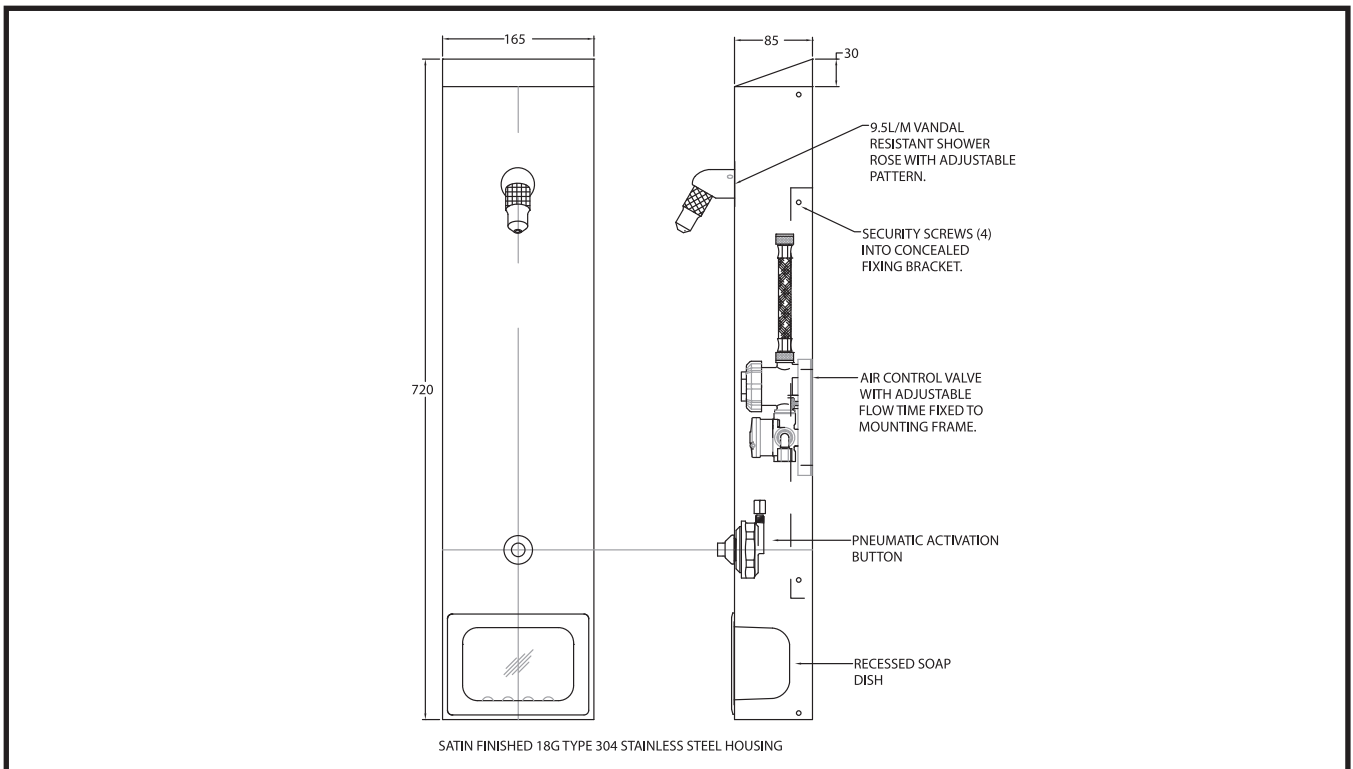

As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 07/11 Printed in Australia © 2011 by RBA Group TD/Model RBA8520-486/0711