

Slido Classic 80-N & Smuso Soft Close

sliding door solutions from Häfele



Slido Sliding Door Fittings

Slido - Sliding door fittings from Häfele

Häfele supplies sliding doors for any application under the Slido brand. These doors are particularly outstanding because of the wide range of different combination options.

- Slido sliding door systems are available for wall or ceiling mounting
- There are many different fascia options for sliding door systems
- Slido sliding door systems can be used for door weights from 40 to 750 kg



Sliding door applications

The available fitting systems can be subdivided into the following groups:



Fittings for timber sliding doors

- Space-saving room elements block the view of the areas behind them
- Combination with coloured surfaces
- Modern room design

Variants:

Classic - with these fittings the moving elements and the suspension elements of the sliding door are hidden and covered

Design - with these fittings, the moving parts and the suspension elements of the sliding door are visible, and can therefore be used as a design feature in the room



Fittings for glass sliding doors

- Space-saving room elements
- Brightness and transparency in the rooms
- Modern room design using coloured or textured glass
- Combination with fixed glazing elements

Variants:

Classic - with these fittings the moving elements and the suspension elements of the sliding door are hidden and covered

Design - with these fittings, the moving parts and the suspension elements of the sliding door are visible, and can therefore be used as a design feature in the room



Fittings for folding doors

- Space-saving room elements
- Room partitioning
- Large passageways can be partitioned off
- Combination with fixed glazing elements

Variants:

Classic - with these fittings the moving elements and the suspension elements of the sliding door are hidden and covered

Design - with these fittings, the moving parts and the suspension elements of the sliding door are visible, and can therefore be used as a design feature in the room

Smuso - Soft and Self Closing System

Smuso - Soft and self closing systems from Häfele

Häfele supplies a full range of soft closing systems for access doors, flaps and also for sliding doors. Smuso soft closing systems are specially designed and tested. Their ease of installation is truly impressive, and also have the following advantages when they are being used:

- Noise reduction
- Lower accident risk
- Increased operating convenience
- Material-friendly

smuso ○○○




Smuso and Slido - The ideal combination for additional comfort

Sliding doors that close gently and quietly increase comfort in the living and working environments. Smuso soft and self closing mechanisms can be integrated in Slido sliding door systems for door weights of 40 and 80 kg. The Smuso soft and self closing mechanism is integrated in the running track, where it is invisible.




Slido Sliding Door Fittings - with Smuso soft close systems

Classic 80-N Sliding door fitting

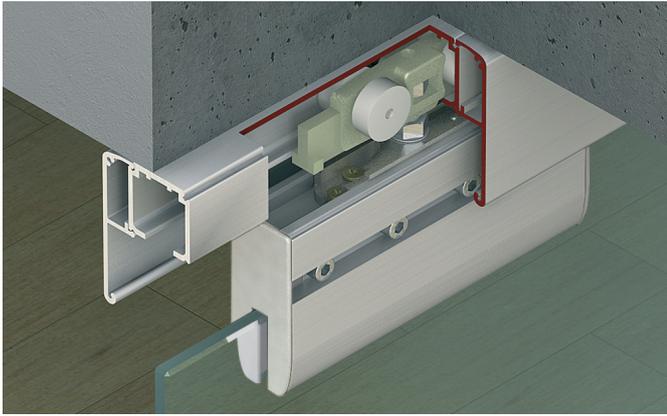


- Area of application: For 1-leaf and 2-leaf sliding doors
- Suitable for: Toughened safety glass
- Glass thickness: Toughened safety glass: 8 or 10 mm
- Adjustment facility: Door height adjustable
- Installation: Suspension with flange clip (without tools)
- Door weight: ≤80 kg per door


Soft closing versions overview

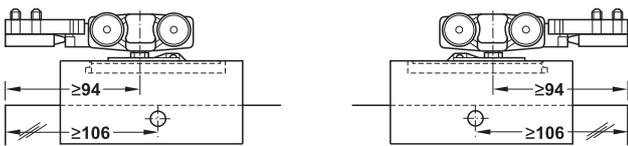

Version **A1** & **A2** Without soft and self closing mechanism

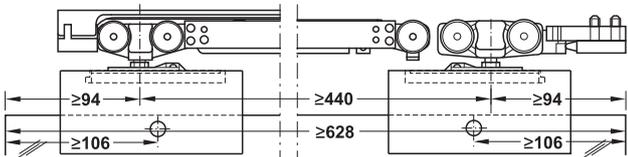


Version **B1** & **B2** With soft and self closing mechanism on one side

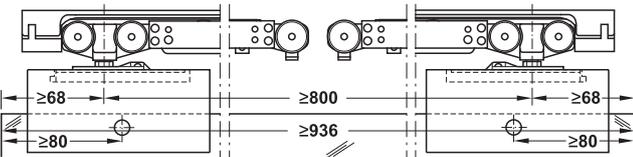


Version **E1** & **E2** With soft and self closing mechanism on both sides (2 x one-sided)

1 = glass thickness 8 mm
2 = glass thickness 10 mm



Ceiling installation and wall mounting

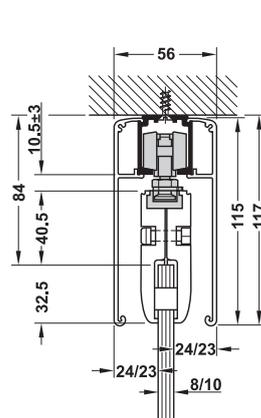


Ceiling installation

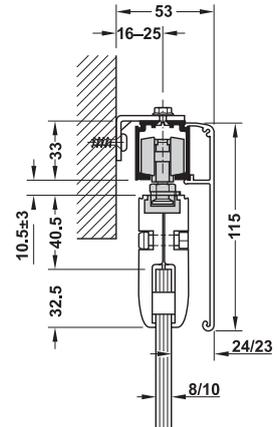

Wall mounting with clip panel and concealed mounting bracket




Installation




Left flange clip

Right flange clip

Opening size



For dim. X see "Soft closing versions overview"

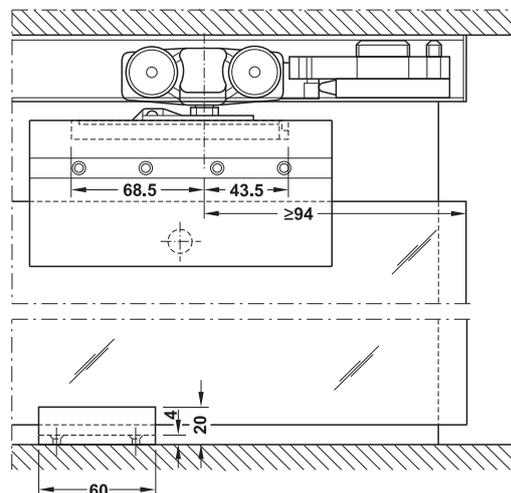

Section trolley hanger and guide

Slido Sliding Door Fittings - with Smuso soft close systems

Classic 80-N Set

	For glass thickness mm	Version		Door width mm	Cat. No.
For 1-leaf sliding doors without running track with floor guide	8	A1	without soft and self closing mechanism	–	940.82.113
	10	A2	without soft and self closing mechanism	–	940.82.114
	8	B1	with soft and self closing mechanism on one side	≥628	940.82.106
	10	B2	with soft and self closing mechanism on one side	≥628	940.82.107
	8	E1	with 2 x soft and self closing mechanism on one side	≥936	940.82.109
	10	E2	with 2 x soft and self closing mechanism on one side	≥936	940.82.110


Order reference

Order 2 sets for 2-leaf sliding doors.

940.82.113 and **940.82.114** includes only one track buffer. Please order further track buffers separately, if required.

Set for door glass thickness 12 mm on request.

Classic 80-N Set components

	For glass thickness mm	Mounting	Version	For single door	Cat. No.
Running gear, 4 rollers, suspensions screw with nut, flange clip for hooking in (without tools), nickel plated zinc, without soft and self closing mechanism with floor guide	Fig. see soft closing versions overview	Left	A1, A2	1 piece	940.82.113
		Right	A1, A2, B1, B2	1 piece	940.82.114
Running gear, 4 rollers, suspension screw with nut, flange clip for hooking in (without tools), nickel plated zinc, soft and self closing mechanism on one side with floor guide	Fig. see soft closing versions overview	Left	B1, B2, E1, E2	1 piece	
		Right	E1, E2	1 piece	940.82.106
Glass clamp shoe set for glass thickness 8 mm, with floor guide and lateral end caps		–	A1, B1, E1	1 piece	940.82.107
Glass clamp shoe set for glass thickness 10 mm, with floor guide and lateral end caps		–	A2, B2, E2	1 piece	940.82.109
Track buffer with retaining spring and rubber buffer, plastic, grey		–	A1, A2, B1, B2	1 piece	
Release device with stopper, steel galvanised		–	B1, B2, E1, E2	2 pieces	940.82.110

Tracks and accessories

		Material	Finish/colour	Length mm	Cat. No.
Single running track, pre-drilled, 31 x 33 mm (W x H)		Aluminium	Bright	2000	940.43.921
				3000	940.43.931
				6000	940.43.961
Mounting bracket, with screw and nut		Steel	Galvanised	–	940.42.061
Clip panel, height 115 mm		Aluminium	Silver Colour Anodised	2000	940.43.420
				3000	940.43.430
				4000	940.43.460
Floor guide with zero clearance		Plate: Stainless steel, Guide: Plastic	Plate: Matt, Guide: Black	–	940.43.033

Note: Install wall mounting brackets every 400 mm.



HÄFELE AUSTRALIA PTY. LTD.
State Offices

Victoria (Head Office)
T: (03) 9212 2000
F: (03) 9212 2001
E: info@hafele.com.au

New South Wales
T: (02) 8788 2200
F: (02) 8788 2201
E: nsw@hafele.com.au

A.C.T. & Southern NSW
T: (02) 6202 2800
F: (02) 6228 1418
E: act@hafele.com.au

Northern New South Wales
T: (02) 8788 2200
F: (02) 4921 0901
E: nsw@hafele.com.au

Queensland
T: (07) 3307 8900
F: (07) 3307 8901
E: qld@hafele.com.au

South Australia
T: (08) 8232 9933
F: (08) 8232 9977
E: sa@hafele.com.au

Western Australia / N.T.
T: (08) 9209 8000
F: (08) 9249 3328
E: wa@hafele.com.au

Tasmania
T: (03) 6331 7106
F: (03) 6334 6414
E: tas@hafele.com.au

Design Centres
Melbourne Design Centre
T: (03) 9212 2000
F: (03) 9652 3701
E: info@hafele.com.au

Sydney Design Centre
T: (02) 8788 2200
F: (02) 8302 2101
E: nsw@hafele.com.au

Brisbane Design Centre
T: (07) 3307 8900
F: (07) 3307 8901
E: qld@hafele.com.au

Perth Design Centre
T: (08) 9209 8000
F: (08) 9215 6101
E: wa@hafele.com.au

Hobart Design Centre
T: (03) 6331 7106
F: (03) 6334 6414
E: tas@hafele.com.au

HÄFELE NEW ZEALAND LTD.
Offices and Design Centres

Häfele (NZ) Head Office
Eastern Design Centre
T: (09) 274 2040
F: (09) 274 2041
E: info@hafele.co.nz

Auckland Design Centre
T: (09) 274 2530
F: (09) 274 2531
E: architectural@hafele.co.nz


Wellington Design Centre
T: (04) 472 0294
F: (04) 472 0295
E: wellington@hafele.co.nz

Christchurch Design Centre
T: (03) 343 8200
F: (03) 343 8201
E: christchurch@hafele.co.nz


Accessories for glass doors

Classic Individual components


For Classic 40-N, 60-N, 80-N, 100-N sliding door fittings

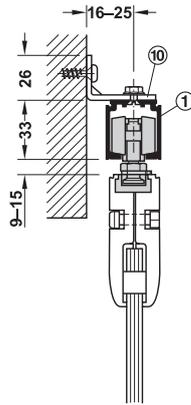


Wall mounting with mounting bracket

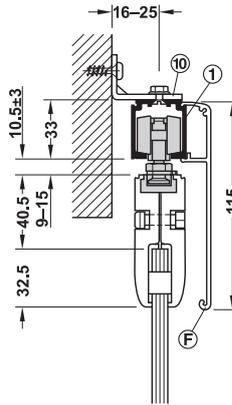


Wall mounting with mounting bracket and clip panel 115 mm

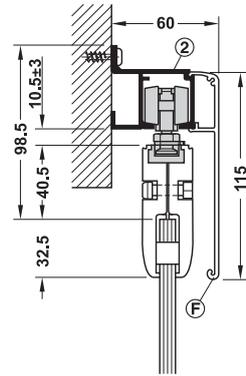


Wall mounting with running track and clip panel 115 mm

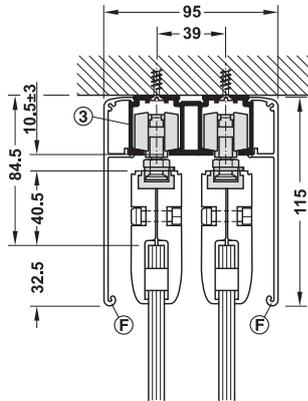


Ceiling installation with double running track and clip panel 115 mm

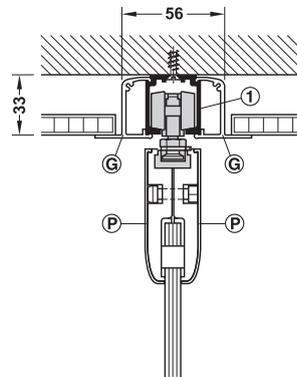

Ceiling installation with running track and 2 x clip panel for integration in suspended ceilings

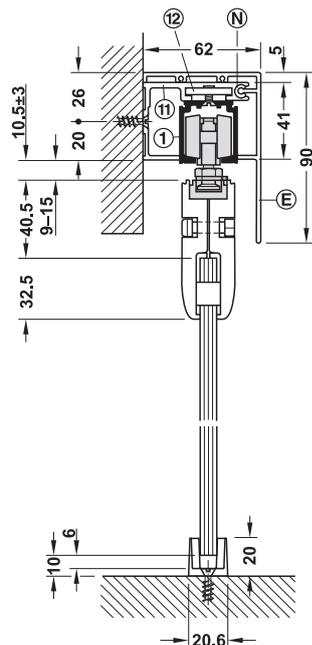


Wall mounting with wall bracket and clip panel 90 mm

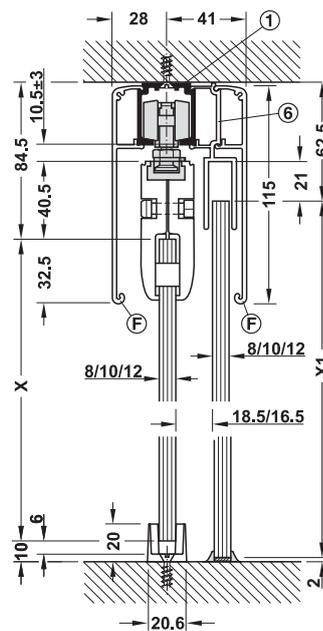

Ceiling installation with running track and clip panel 115 mm including fixed component on wooden supports (wet sealed) provided on site

Other floor guide:



X = glass height for clamp shoe
X1 = glass height for fixed glass fixing profile