

# **CONIROOF 2113**

Covered roof crack-bridging waterproofing system (spray applied membrane)

## DESCRIPTION

**CONIROOF 2113** is a liquid applied, crack bridging covered roof (ie with pavers or gardens) waterproofing system based on advanced polymeric materials. It consists of a primer and a spray applied elastomeric polyurethane waterproofing membrane.

#### **RECOMMENDED FOR**

**CONIROOF 2113** is intended for use on roofs that will be subsequently covered with pavers or gardens. **CONIROOF 2113** is ideally suited to applications that require maximum crack bridging and fast installation.

#### **FEATURES AND BENEFITS**

- · no 'prestriping' of existing cracks required
- · monolithic, no welds laps or seams
- fast installation
- easy and dependable detailing due to spray application of waterproofing membrane

#### SYSTEM BUILD UP

CONIROOF 2113 is composed of

**Primer** depending on substrate.

**CONIPUR M 800/M 810** – a spray applied, 2 component, elastomeric, polyurethane, solvent and filler free, waterproofing membrane.

Primer Broadcasting	Depending on substrate Oven dried silica sand,	0.3 – 0.5kg/m <sup>2</sup>	
	(0.3-0.8mm)	0.8 – 1.0kg/m <sup>2</sup>	
Membrane	CONIPUR M800/M 810	1.6 – 2.1kg/m <sup>2</sup>	

Total thickness approx. 2.0mm

Consumption figures are a guide only and may be higher in rough or porous substrates

## APPLICATION

For detailed, product specific application instructions, see individual product technical data sheets.

#### **MAINTENANCE**

Regular cleaning and maintenance will prolong the life of all resin coatings, enhance the appearance and reduce the tendency to pick up dirt. Specialised floor cleaning equipment and chemicals are available and the suppliers are able to offer advice on appropriate cleaning regimes.

#### **PRECAUTIONS**


Fully cured, CONIPUR products are considered non-hazardous materials. When handling CONIPUR products, avoid inhalation of vapours and contact with eyes, skin and clothing. Wear impervious gloves and eye protection. In case of eye contact, seek medical attention. When working with the products, do not eat, smoke or work near a naked flame. For additional information concerning safety hazards, regulations regarding transport and waste management, please refer to the relevant Material Safety Data Sheet.

The regulations of the local trade association and/or other authorities, regulating safety and hygiene of workers handling polyurethanes, isocyanates and epoxy resins must be observed. Keep packaging away from heat, flames and sources of ignition. Do not cut or weld on or near empty packaging.

For the full health and safety hazard information and how to safely handle and use this product, please make sure that you obtain a copy of the individual products BASF Construction Chemicals **Material Safety Data Sheet (MSDS)** from our office or our website.



# **CONIROOF 2113**

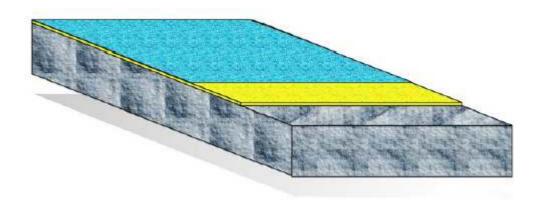

		Consumption
Primer	According to substrate	
Membrane	CONIPUR M 80/M 810, pigmented, PU, 2 component, solvent free, spray applied	1.6 – 2.1kg/m²
Total Thickness of System		Approx. 2mm

#### A/Croof2113/6/1011

# STATEMENT OF RESPONSIBILITY

The technical information and application advice given in this BASF publication are based on the present state of our best scientific and practical knowledge. As the information herein is of a general nature, no assumption can be made as to a product's suitability for a particular use or application and no warranty as to its accuracy, reliability or completeness either expressed or implied is given other than those required by law. The user is responsible for checking the suitability of products for their intended use.

NOTE

Field service where provided does not constitute supervisory responsibility. Suggestions made by BASF either orally or in writing may be followed, modified or rejected by the owner, engineer or contractor since they, and not BASF, are responsible for carrying out procedures appropriate to a specific application.

BASF Australia Ltd		Newcastle	(02) 4961 3819	Adelaide	(08) 8139 7500
A.B.N. 62008437867	Canberra	(02) 6280 6010	Perth	(08) 9366 2600	
Head Office: 11 Stanton Road	Brisbane	(07) 3633 9900	Darwin	(08) 8984 3269	
Ph. (02) 8811 4200	Townsville	(07) 4774 7344	Kalgoorlie	0417 772 355	
		Melbourne	(03) 9549 0300		
BASF New Zealand Ltd	Head Office: 45 William Pick	kering Drive, A	Albany, Auckland Ph: (0	9) 414 7233	3
BASF WEB SITES www.basf-cc.com.au www.basf-cc.co.nz www.meyco.basf.com					