


REUSE
PROTECT
PRESERVE



Suitable for installation with:

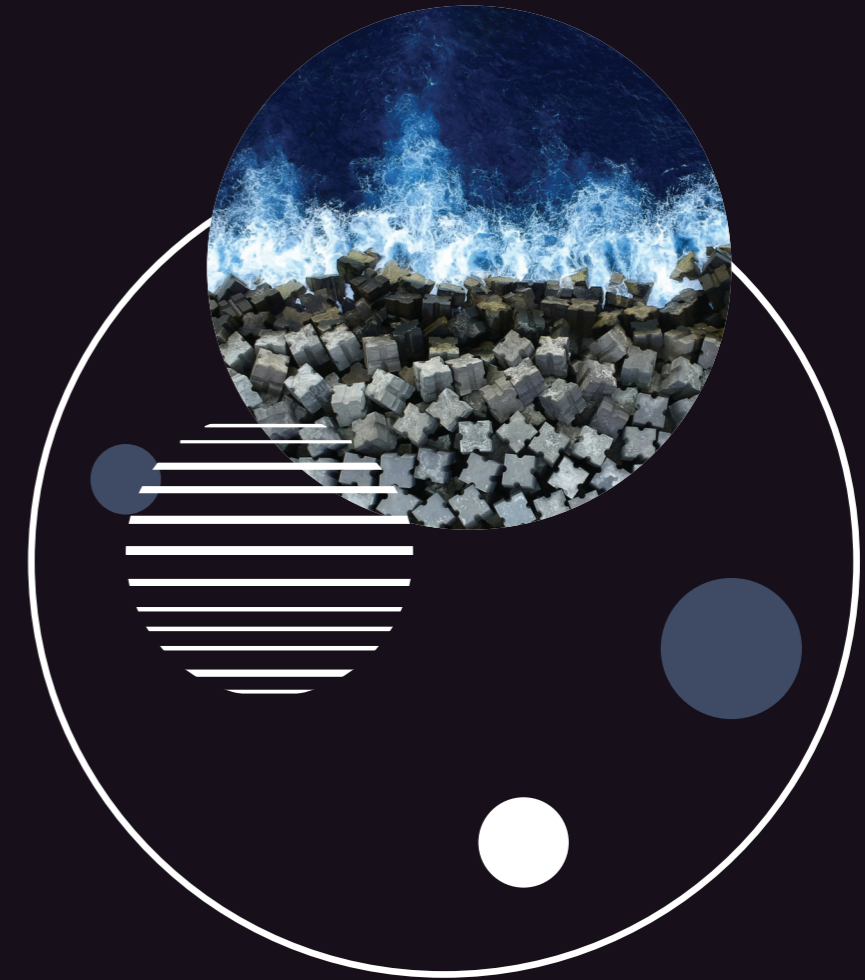

Roller
Shades



Panel Glide
Shades



Vertical
Shades



AllBloc

MADE FROM 100% POLYESTER
100% PVC FREE
RECYCLABLE

BLACKOUT

ROLLER SHADE SOLAR CONTROL FABRIC



AlIbloc Blackout

- Openness Factor . **Of** •
- Ultraviolet Transmittance . **Tuv** •
- Light Transmittance . **Tv** •
- Light Reflectance . **Rv** •
- Solar Transmittance . **Ts** •
- Solar Reflectance . **Rs** •
- Solar Absorption . **As** •
- G Value . **G tot** •

0%
openness factor

280-300 cm
fabric width

0.3 mm
thickness

350 g/m²
weight

THIS FABRIC IS MADE FROM 100% POLYESTER

FENESTRATION PROPERTIES

	OF	Tuv	Tv	Rv	Ts	Rs	As	G Value	
								C Glaze	D Glaze
WHITE	0%	0%	0%	64%	0%	73%	27%	-	-
BEIGE	0%	0%	0%	58%	0%	70%	31%	-	-
GREY	0%	0%	0%	41%	0%	46%	52%	-	-
BRONZE	0%	0%	0%	4%	0%	11%	87%	-	-
BLACK	0%	0%	0%	6%	0%	6%	94%	-	-

Data is current at time of printing. Please check website for most current information.

Care Instructions

Handle fabric with care and wear clean gloves. Lightly dust regularly with clean feather duster. A hand-held vacuum with low suction may also be used. When vacuuming, avoid pulling or stretching the fabric. Leave the blind down until completely dry.

Width


Maximum Roller Shade width: 3000 mm.

Fabric Warranty

5 Years (internal use only).

Railroad

This fabric can be railroaded

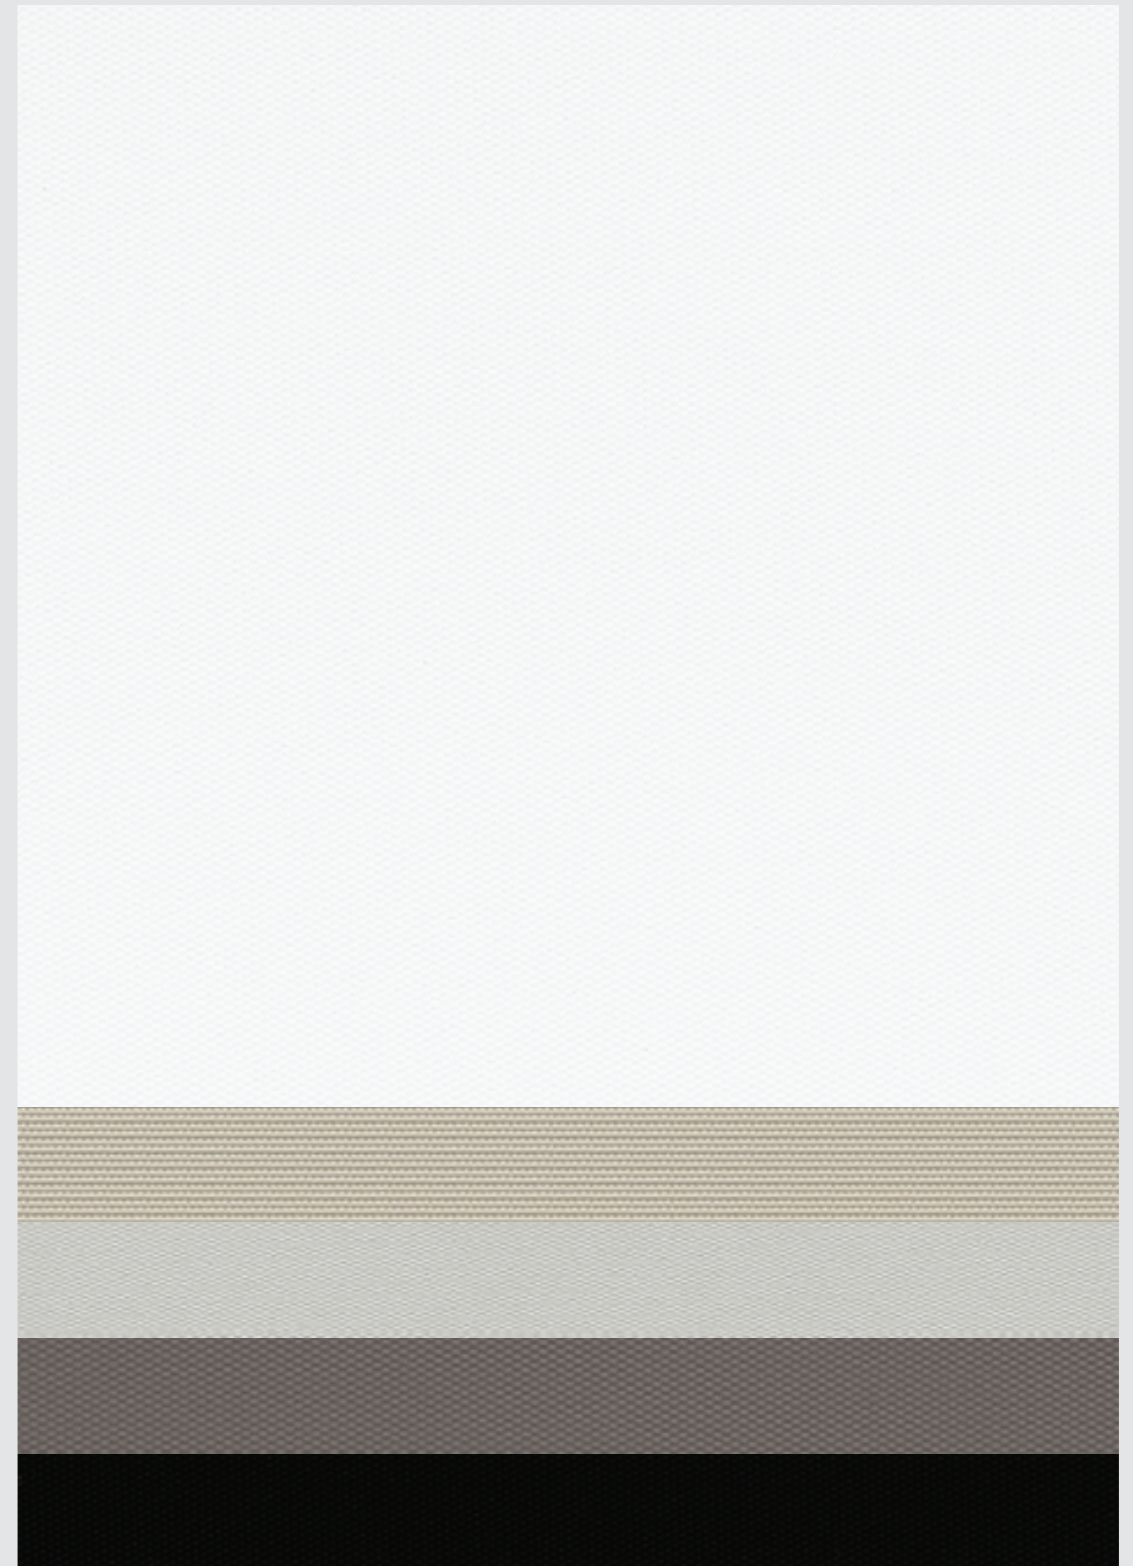

Backing Colour: Matching Tonal Colour



Order a memo sample: info@climatereadyfabrics.com.au