

By appointment to The Royal Danish Court

# morsø






# Morsø 1400 Series

Constructed using the highest quality robust cast iron, this small, clean burning stove is the perfect heat source for smaller spaces. Developed with both rear and bottom heat shield for reduced clearances and better heat convection.

See sizes and specs on page 10.

#### **HEAT AREA:**









1440

# Morsø 4143 & S10-70

The sleek, contemporary styling of the Morso steel range offers a minimalist design. The front of the stove is dominated by the large glass door, which ensures maximum enjoyment of the fire.

• Choice of freestanding and wall mounted models

See sizes and specs on page 10.

#### HEAT AREA:



Heats up to 120m<sup>2</sup>

\* Glass hearth pictured is not available in Australia







Steel Range

S10-70 wall mounted





# Morsø 6100 Series

Constructed using only the highest quality, robust cast iron. The 6100 provides a user friendly one-handle system for heat output control and a curved wide door allowing easy access to the fuel bed.

• Choice of log storage cavity 6143 or with pedestal 6148

See sizes and specs on page 10.

#### **HEAT AREA:**



Heats up to 100m<sup>2</sup>



6143 with storage cavity



6148 with pedestal

# Morsø 6600 Series

The combination of cast-iron, glass and the elliptical shape sets the 6600 series apart from the crowd. These fires provide style, function and supreme performance. The unique double door maximises the glass area providing a 180° view of the flames.

• Choice of wall mounted 6670, with storage cavity 6643 or with legs 6612

See sizes and specs on page 10.

#### **HEAT AREA:**

S M L

Heats up to 120m²



wall hung



with legs



storage cavity





# Morsø 7900 Series

Featuring large panoramic windows on the front and sides for a 180° view of the flames, self-closing door and combustion technology using pre-heated air to produce higher temperatures.

The optional heat storage banks that fit on top of any 7900 stove, stores heat for longer, and emits it slowly providing an eco-friendly option to heating.

• Choice of Low Top for up to 30kilos and High Top for up to 95kilos of heat-storing bricks.

See sizes and specs on page 10.

#### HEAT AREA:

S M L

Heats up to 150m<sup>2</sup>





7943 with drawer



7943 with Low Top Storage Bank



7943 wtih High Top Storage Bank

# Morsø 7948

The Morsø 7948 with its elegant pedestal base, minimalist design and panoramic view of the flames will take centre stage in any room.

This stove has all of the 7900 series features including the optional heat bank storage system.

See sizes and specs on page 10.

#### **HEAT AREA:**

S M L

Heats up to 150m<sup>2</sup>





# Accessories



# Morsø 8842

The Morso 8842 is one of the most powerful Morsø stoves. Manufactured from cast iron with the latest in combustion technology. Features include a one-touch operating lever, self closing glass door and cool to the touch door handle.

See sizes and specs on page 10.

#### HEAT AREA:





Heats up to 150m<sup>2</sup>



with drawer



Firewood Box & Wood Carrier



Loop Log Ring



Curva Wood Carrier



Wood Carrier



Conform Fire Tools



Classic Fire Tools



Ellipse Fire Tools



Loop Fire Tool Set



Complete Fire Tools



Curva Poker



Curva Fire Tool Set



Morsø Leather Glove



Ash & Storage Bucket



Morsø Axe



Classic Trivet

# Dimensions & Specifications

# Classic Range - 1410



	vveignt	7 UKG
	Heat Output (Nominal)	6.8kW
	Approx. heat area	60-90 m <sup>2</sup>
	Efficency	72%
	Emissions	1.8g/Kg
	Flue exit top/rear fits to	ø120mm
	Hearth Dimensions (WxD) mm* Thickness: Equal to minimum 6mm Sheet	
N-	* Hearth depth includes minimum	of 300mm

* Hearth	denth	includes	minimum	of 300mm
in front	асрат	incidaes	TTTTTTTTTTTTTTTTTTTTTTTTTTTTTTTTTTTTTT	01 000111111

Clearances to combustibles	
Sides	600mm
Rear	150mm
Corner	600mm

#### Classic Range - 1440



Heat Output (Nominal)	6.8kW
Approx. heat area	60-90 m <sup>2</sup>
Efficency	72%
Emissions	1.8g/Kg
Flue exit top/rear fits to	ø120mm
Hearth Dimensions (WxD) mm* Thickness: Equal to minimum 3.5 Sheet	

\* Hearth depth includes minimum of 300mm in front

Clearances to combustibles	
Sides	230mm
Rear	150mm
Corner	150mm

# Steel Range - 4143



Weight	105kg
Heat Output (Nominal)	7.6kW
Approx. heat area	90-120 m <sup>2</sup>
Efficency	68%
Emissions	1.4g/Kg
Flue exit top/rear fits to	ø150mm
Hearth Dimensions (WxD) mm* Thickness: Equal to minimum 6mm Sheet	859 x 764 Cement
ware at the state of the state	

-	364 137	1	Cle
			Sic Re Co
0			

Clearances to o
Sides Rear Corner

Weight	105kg
Heat Output (Nominal)	7.6kW
Approx. heat area	90-120 m <sup>2</sup>
Efficency	68%
Emissions	1.4g/Kg
Flue exit top/rear fits to	ø150mm
Hearth Dimensions (WxD) mm* Thickness: Equal to minimum 6mm Sheet	859 x 764 Cement
* Hearth depth includes minimum	of 300mm

in front	
Clearances to combustibles	
Sides Rear Corner	400mm 100mm 175mm

# Steel Range - S10-70





	409	
456	182,5	* Hear in fron
	8	
730	1 200 / 268	593
Min. 300	220	86

Clearances to combustible	es
Sides Rear	400mm N/A
Corner	175mm

# Modern Range - 6143



Weight	114kg
Heat Output (Nominal)	8.0kW
Approx. heat area	80-100 m <sup>2</sup>
Efficency	65%
Emissions	1.5g/Kg
Flue exit top/rear fits to	ø150mm
Hearth Dimensions (WxD) mm* Thickness: Equal to minimum 6mm Sheet	
* Hearth depth includes minimum	of 300mm

ſ	386	451	
303	26		0
950			0 / 1/474
			322

Sheet	
<sup>*</sup> Hearth depth includes m n front	inimum of 300mm
Clearances to combustibl	es
Sides	425mm

150mm 210mm

# Modern Range - 6148



Weight	110kg
Heat Output (Nominal)	8.0kW
Approx. heat area	80-100 m <sup>2</sup>
Efficency	65%
Emissions	1.5g/Kg
Flue exit top/rear fits to	ø150mm
Hearth Dimensions (WxD) mm* Thickness: Equal to minimum 6mr Sheet	

\* Hearth depth includes minimum of 300mm in front

193	451
056	1860
Ø410	

	Clearances to combustibles			
1	Sides Rear Corner	425mm 150mm 210mm		

# Modern Range - 6612



Weight	138kg
Heat Output (Nominal)	10.8kW
Approx. heat area	100-120 m <sup>2</sup>
Efficency	64%
Emissions	1.5g/Kg
Flue exit top/rear fits to	ø150mm
Hearth Dimensions (WxD) mm* Thickness: Equal to minimum 6mm Sheet	860 x 957 Cement
* Hearth depth includes minimum	of 300mm

*	Hearth	depth	includes	minimum	of 300mm
ir	n front				

#### Clearances to combustibles

625mm
275mm
300mm

# Modern Range - 6643



Weight	123kg
Heat Output (Nominal)	10.8kW
Approx. heat area	100-120 m <sup>2</sup>
Efficency	64%
Emissions	1.5g/Kg
Flue exit top/rear fits to	ø150mm
Hearth Dimensions (WxD) mm* Thickness: Equal to minimum 6m Sheet	
* Hearth depth includes minimum	of 300mm

#### Clearances to combustibles

Sides	650mm
Rear	275mm
Corner	300mm

# Modern Range - 6670



	Weight	120kg
	Heat Output (Nominal)	10.8kW
	Approx. heat area	100-120 m <sup>2</sup>
	Efficency	64%
	Emissions	1.5g/Kg
	Flue exit top/rear fits to	ø150mm
399	Hearth Dimensions (WxD) mm* Thickness: Equal to minimum 6mm Sheet	

* Hearth	depth	ıncludes	mınımum	of 300mr	η
in front					

#### Clearances to combustibles

Sides	650mm
Rear	N/A
Corner	N/A

# Modern Range - 7943



Weight	162kg
Heat Output (Nominal)	12.5kW
Approx. heat area	100-150 m <sup>2</sup>
Efficency	73%
Emissions	1.3g/Kg
Flue exit top/rear fits to	ø150mm
Hearth Dimensions (WxD) mm* Thickness: Equal to minimum 6mm Sheet	900 x 920 Cement
The state of the s	

 $^{\star}$  Hearth depth includes minimum of 350mm

#### Clearances to combustibles

Sides	625mm
Rear	135mm
Corner	400mm

# Modern Range - 7948



Weight	156kg
Heat Output (Nominal)	12.5kW
Approx. heat area	100-150 m <sup>2</sup>
Efficency	73%
Emissions	1.3g/Kg
Flue exit top/rear fits to	ø150mm
Hearth Dimensions (WxD) mm* Thickness: Equal to minimum 6mm Sheet	900 x 920 Cement
+11 d l d l l l l l l l l	( ) = 0

<sup>\*</sup> Hearth depth includes minimum of 350mm in front

			Ø50	14	]	184	35
1157	757				616		
	400	_	Ø50				

Clearances to combustibles	
Sides Rear Corner	625mm 135mm 400mm

### Modern Range - 8842




Weight	179kg
Heat Output (Nominal)	7.2kW
Approx. heat area	100-150 m <sup>2</sup>
Efficency	69%
Emissions	0.8g/Kg
Flue exit top/rear fits to	ø150mm
Hearth Dimensions (WxD) mm* Thickness: Equal to minimum 6mi Sheet	740 x 1000 m Cement

\* Hearth depth includes minimum of 450mm

#### Clearances to combustibles



0.00.0000 00 00000	
Sides Rear Corner	400mm 100mm 225mm

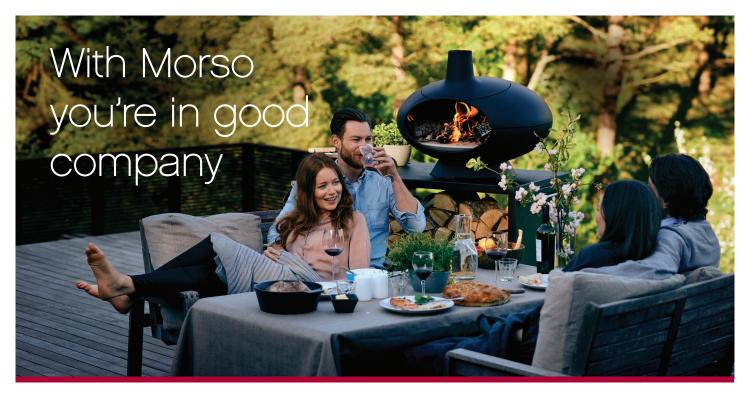

It's easy to enjoy long and cosy evenings under the stars with the Morso Living range. With the substantial Forno, hosts have an oven, grill, smoker and rollicking fire in one. The portable Grill Forno offers perfect grilling, while the elegant Kamino delivers welcoming heat. These outdoor ovens and fires are a symphony of Danish Design, fire and food – just what every good night out needs.

Explore the possibilities, ask your retailer for a brochure today or visit castworks.comau







DISTRIBUTORS



Your Morsø dealer