



Thermofoil PRO™ is an aluminium underfloor heating foil designed to bring the underfloor heating experience to laminate flooring, carpet & vinyl.

- ✓ Designed for use under laminate flooring
- ✓ Single point connection
- ✓ Twin conductor cable
- ✓ Simple cut and return installation
- ✓ Durable construction
- ✓ 15 year warranty

140W/M² UNDERLAMINATE FOIL

Thermofoil PRO™ is specifically designed to give the perfect spread of heat when installed under floating laminate flooring and engineered boards.

Thermofoil PRO™ comes in 500mm wide strips in lengths from 2 – 24m and at less than 3mm thick, is perfect for applications where height build up matters.

This floor warming system includes a fluoropolymer insulated heating cable woven into a specially reinforced aluminium foil that allows for simple roll-out installation without worrying about cable spacing.

ENHANCE EVERY PROJECT

Enhance your project with Thermofoil PRO™ premium quality underlaminating foil. The Thermonet® experience guarantees a hassle free installation and ultimate comfort.

Heat transfer foil

3.5mm thick



INCLUDED IN THE RANGE

- Thermofoil PRO™ 140W/m²
- Vapour Barrier
- HeatPak Overlay
- Aluminium Fixing Tape
- Rigid Insulation Board
- Available in lengths of 21m - 241m

WHAT'S IN THE BOX

- Thermofoil PRO™ mat
- Aluminium Fixing Tape
- Instruction Manual

FLEXIBLE SIZING FOR ANY ROOM

Thermofoil PRO™ under laminate heating mats are available in standard lengths up to 24lm to fit rooms of between 1 - 12m². Multiple Thermofoil PRO™ mats can be installed in parallel to fit larger areas.

EASY INSTALLATION

Thermofoil PRO™ comes on a fixed output roll ready to fit. You can be assured of a fast and easy installation.

PRIMARY HEAT SOURCE FOR NEW BUILDS

Thermofoil PRO 140W/m² is ideal for use as a primary heat source in new build projects, when insulated to the required level.


SUITABLE FOR LAMINATE, CARPET & VINYL

Thermofoil PRO™ can be installed under a wide range of floor finishes including engineered timber, laminate, carpet and vinyl.

Always check with your flooring manufacturer that your chosen floor finish is suitable for use with 140W/m² underfloor heating systems. Depending on your floor finish you may also need to install HeatPak dual overlay system.


SIMPLE CUT AND RETURN INSTALLTION

Similar to our Thermonet® underfloor heating mats, Thermofoil PRO™ 140W/m² can be cut and returned for easy installation. Just make sure you don't cut the heating cable!

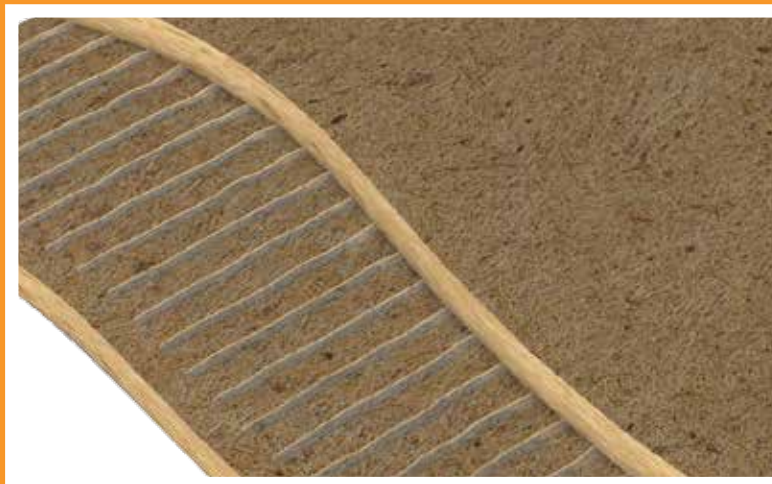

HeatPak Performance Overlay

HeatPak is a low resistance, free floating sub floor specifically designed for installation over all kinds of underfloor heating systems. This unique product provides a stable sub floor for laying laminate, carpet and vinyl floor finishes. HeatPak provides a smooth and seamless subfloor that protects both your floor finish and underlamine foil system.

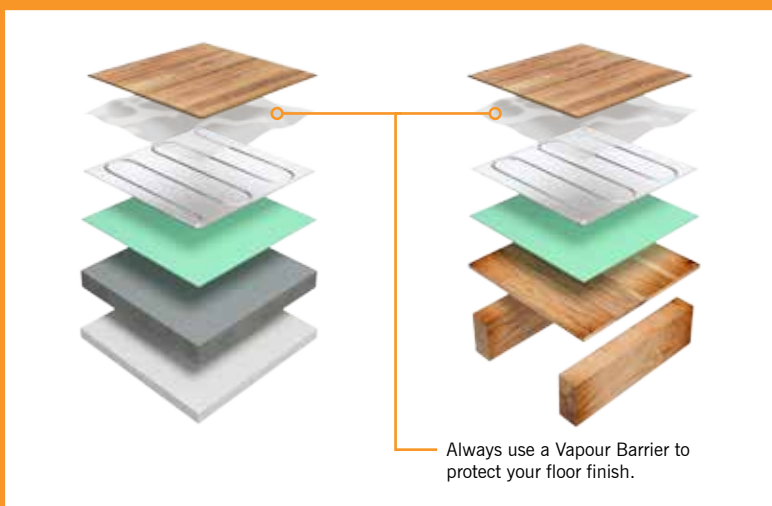

Use with different finishes and substrates...

You can install Thermofoil PRO™ on timber or concrete substrates under a wide range of finishes including laminate, wood, carpet or vinyl. Always check suitability with your flooring manufacturer.

Thermofoil PRO™ 140 W/m²

STOCK NO	SIZE (M)	AREA (M ²)	OUTPUT (W)
121402	2.0 x 0.5	1.0	140
121403	3.0 x 0.5	1.5	210
121404	4.0 x 0.5	2.0	280
121405	5.0 x 0.5	2.5	350
121406	6.0 x 0.5	3.0	420
121408	8.0 x 0.5	4.0	560
121410	10.0 x 0.5	5.0	700
121412	12.0 x 0.5	6.0	840
121416	16.0 x 0.5	8.0	1120
121420	20.0 x 0.5	10.0	1400
121424	24.0 x 0.5	12.0	1680

CONTACT US ONLINE

Browse our full product range, watch videos, download product literature and get a quote, all on the Thermogroup website.

www.thermogroup.com.au

CONTACT US BY PHONE

Got a question or query? Call our AUS support line free from your land line. Open 07:30 - 16:30 Mon - Fri

1300 368 631

CONTACT US BY MAIL

Tell your satnav where to find us or just write us a letter to say hello!

Thermogroup Pty Ltd, 28-30 Pine Ave, Leeton, NSW 2705