


WaterhogTM Classic No. 200 - Entrance Mat

Features and Benefits

- Meet the original WaterhogTM. Tough, long-lasting and proven for Australian conditions. Ideal for all weather and high traffic.
- No other mat in the industry traps water and dirt so effectively.
- Rubber reinforced face nubs and its "waffle" design provides a crush-proof scraping action.
- The raised-rubber water-dam traps dirt and absorbs water keeping it off carpets, tiles and floors.
- Waterhog Classic is ideal for most applications inside or out.
- The unique design and style makes it revolutionary!
- WaterhogTM Classic is anti-static, maximum average voltage of 1.6KV. Safe for use in computer rooms and around electronic equipment.
- Green friendly rubber backing has 20% recycled rubber content.
- All Waterhog mats are certified slip resistant by the National Floor Safety Institute
- Tested by CSIRO

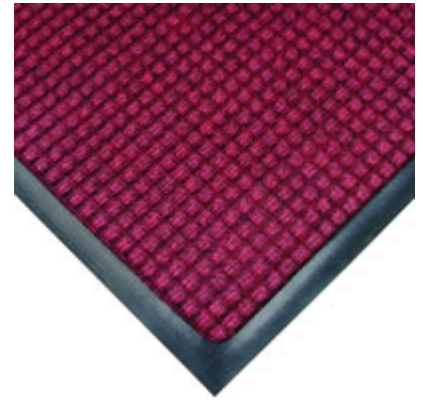

Construction Details

A: Unique ridged construction effectively removes and traps dirt and moisture.

B: Exclusive rubber-reinforced face nubs prevent pile from crushing, extending product life.

C: Anti-static 100% premium polypropylene. Fabric dries quickly; won't fade or rot. Can easily be vacuumed or hosed out.

D: Special Tri-GripTM cleated rubber backing minimises movement in most carpets and improves traction on hard surfaces.

E: Exclusive "water dam" allows WaterhogTM Classic mat to hold up to 6.7 litres per square metre. Water and dirt stay in the mat. (Some styles available without dam for outside use, so water can drain easily.

Note: Colours subject to change from dye lot to dye lot.

Mat Specifications

Uses: Entrance areas

Compound: Yarn: Solution-dyed polypropylene, Backing: SBR Rubber

Durometer: 55 per ASTM D2240

Thickness: 10mm


Edges: Safety bevelled on all four sides

Flammability: "A" Rating of DOC FF1-70

Warranty: 3 years

Colour: Bluestone, Charcoal, Dark Brown, Evergreen, Red/Black



 Please advise if the matting is for a recess. All recess matting will be supplied **OVERSIZED** to enable you to cut into the existing frame.

Custom widths and unique configurations are available. Please call for a quotation.

Tested by CSIRO.

The test results are available upon request ([Click Here](#)). Wet Pendulum Test/Dry Floor Friction Test - AS/NZS4586:1999



Mat Stock Sizes*

600mm x 900mm
900mm x 1500mm
900mm x 3000mm
1200mm x 1800mm

Charcoal and Red/Black only
1200mm x 2400mm

Charcoal Only
1200mm x 6000mm
1800mm x 2400mm
1800mm x 3600mm
1800mm x 6000mm
Per metre cut to length
x 1200mm or 1800mm wide
(* Sizes are approximate only.)



Construction

Face: Moulded reinforced textile
Compound: Solution-dyed Polypropylene
Pile Height: 10mm
Face Weight: 680g
Backing: SBR Rubber