

BACKREST



RBA4150-100 Backrest

RBA4150-111 Backrest

Description:

Unit is site adjustable upon installation to ensure accurate location & angle of backrest. Compliant with 1100N test.

Designers Note:

RBA product is disabled compliant if it is installed to meet the requirements stipulated in the AS1428.1-2009.

Materials:

Bar: Type-304, Stainless Steel tubing with satin finish, 30mm Dia.

Concealed Mounting Flanges: Cast from type-304, stainless steel, 4mm thick, with 3 holes for attachment to wall.

Bracket Cover: Type-304 Stainless Steel, locks over mounting bracket to conceal mounting screws.

Fixings: by others.

Available Models:


RBA4150-100 White polyurethane, 40 mm thick backrest

RBA4150-111 Stainless Steel backrest

Installation

Warning: Backrests are no stronger than the anchors or walls to which they are attached and, therefore, must be firmly secured in order to support the loads for which they are intended.

Refer Installation Instructions for location of fixing points, method of attachment, etc.

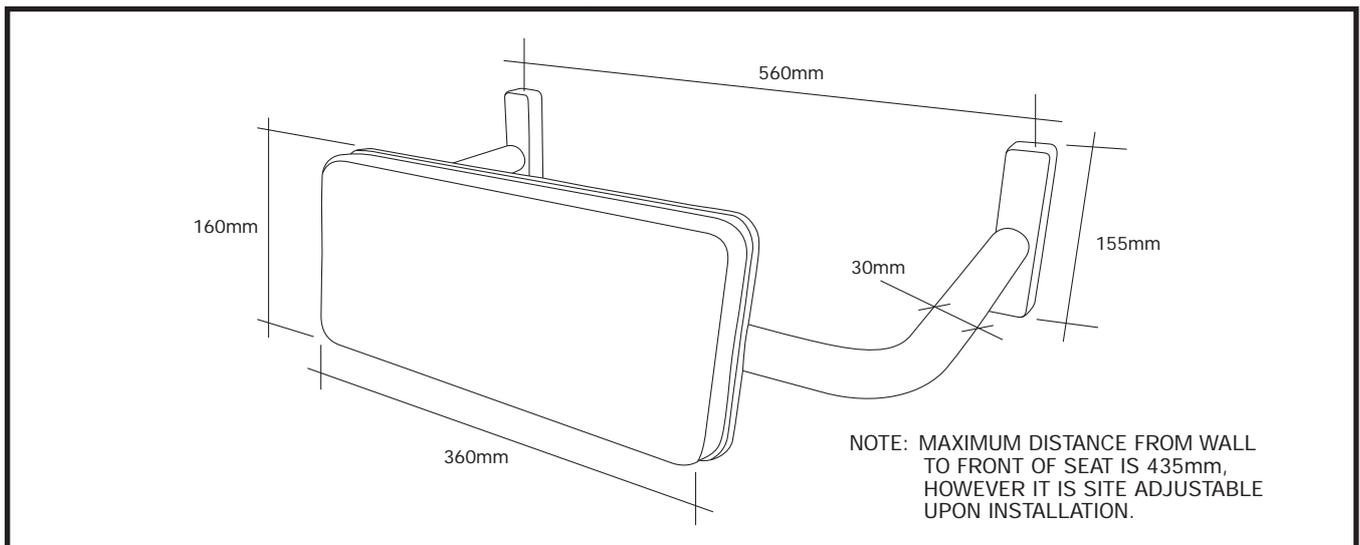

As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 02/12 Printed in Australia © 2011 by RBA Group TD/Model RBA4150-100&RBA4150-111/0212

SYDNEY • MELBOURNE • BRISBANE • PERTH • AUCKLAND

Australia 1300 788 778 • sales@rba.com.au • www.rba.com.au

New Zealand 0800 722 111 • sales@rbagroup.co.nz • www.rbagroup.co.nz