

Luvia Weatherboards

Premium Treated and Primed Weatherboards





wrightforest
products



LUVIA  WOOD

Luvia Weatherboard Profiles



Profiles and Styles

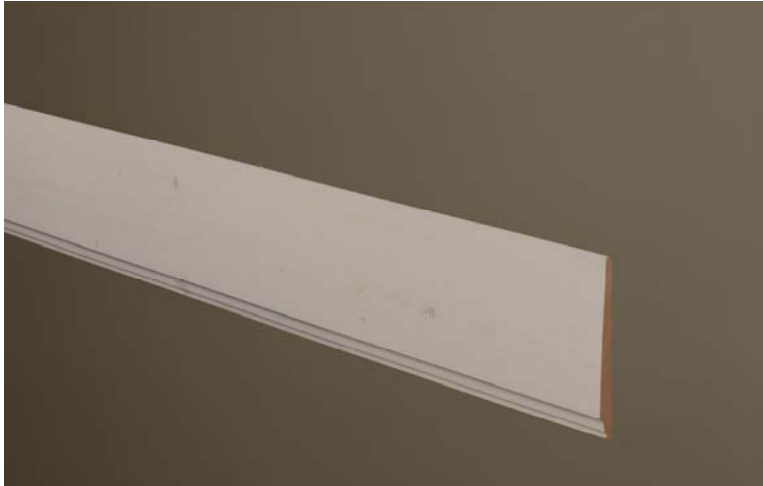

Luvia Gori T3 Primed
Merino 175mm
Gori UC3
Order Code:
WWLAMP175

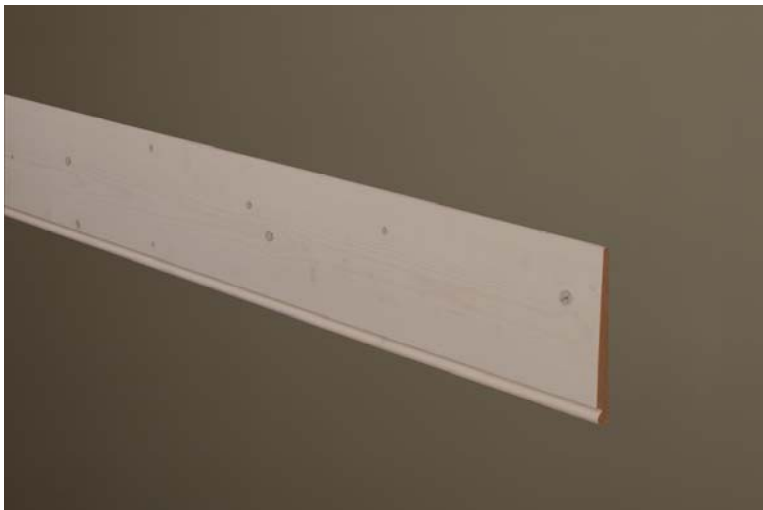

Luvia Gori T3 Primed
Old Melbourne 175mm
Gori UC3
Order Code:
WWREGP175

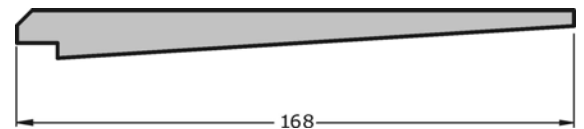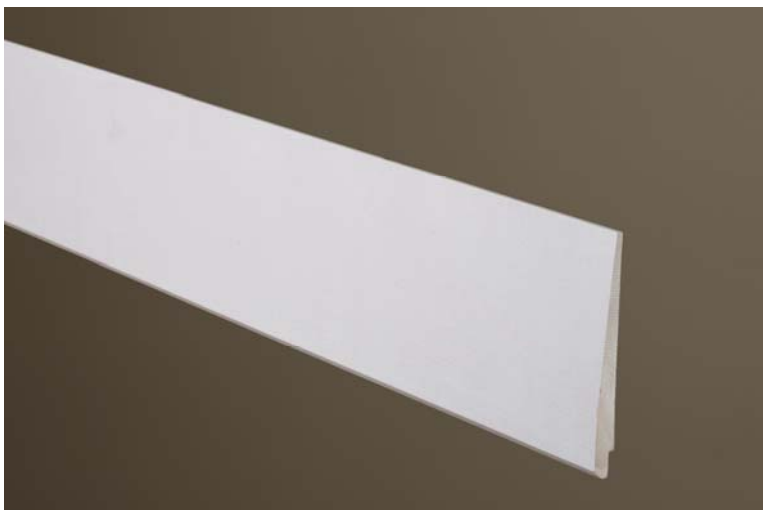


Luvia Primed or Unpainted
Old Sydney C&C
Order Code
WWCCP175

wrightforest
products


LUVIA  WOOD

Luvia Weatherboard Profiles


Profiles and Styles



Luvia H3 Textured or Smooth Natural (Reversible)
Square Edge 175mm
CCA H3
Order Code:
WWS3175

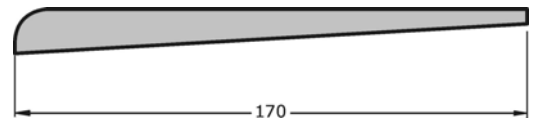

Luvia H3 Natural Unpainted
Round Edge 175mm
CCA H3
Order Code:
WWR3175




Luvia Natural Unpainted
Square Edge 175mm
Order Code:
WWS175

wrightforest
products


LUVIA  WOOD

Luvia Weatherboard Profiles



Profiles and Styles

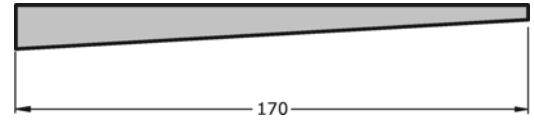

Luvia Gori T3 Primed
Square Edge 175mm
Gori UC3
Order Code:
WWTSP175



Luvia Primed
Square Edge 175mm
Order Code:
WWSP175

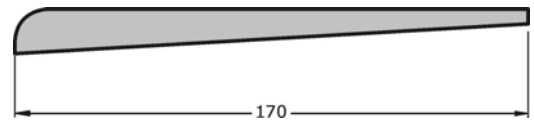
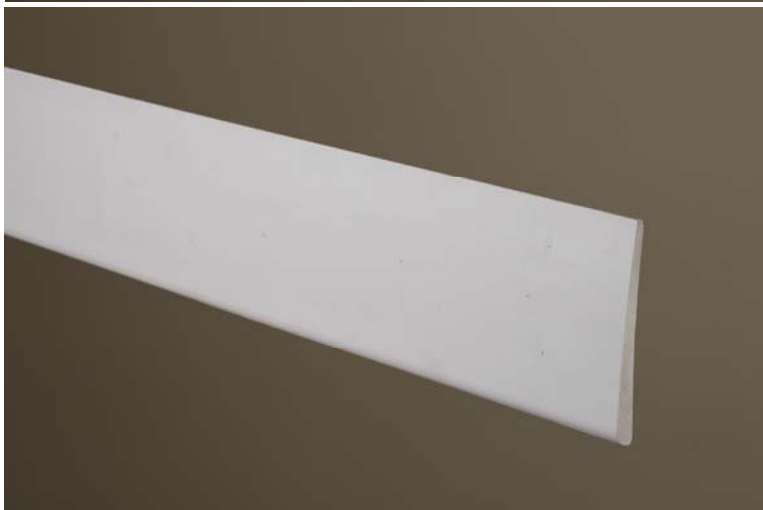


Luvia Gori T3 Primed
Round Edge 175mm
Gori UC3
Order Code:
WWTRP175




Luvia Weatherboard Profiles



Profiles and Styles

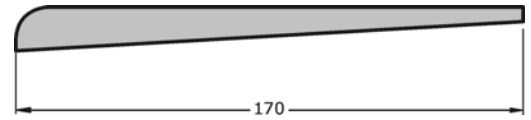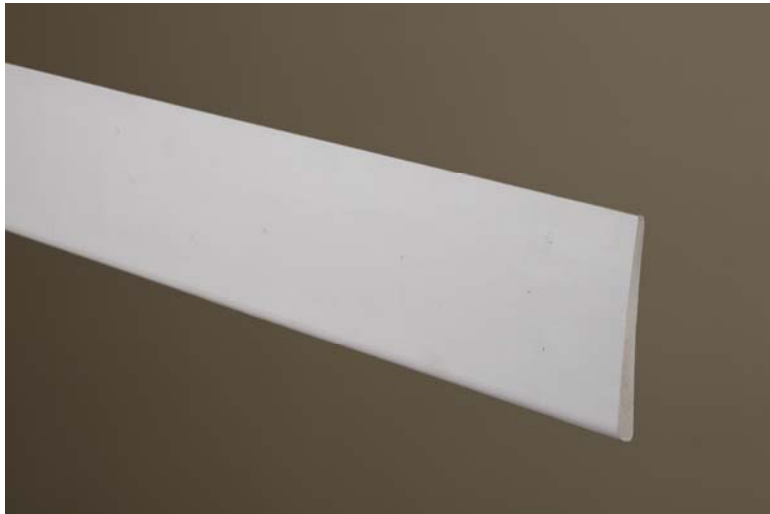

Luvia Primed
Round Edge 175mm
Order Code:
WWRP175

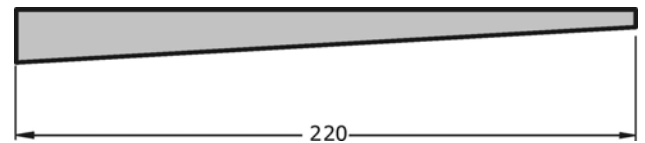

Luvia Primed
Square Edge 225mm
Order Code:
WWSP225

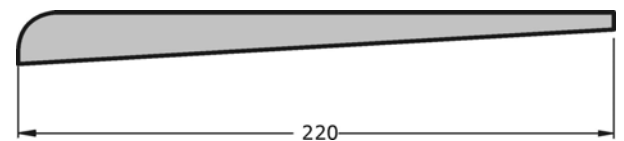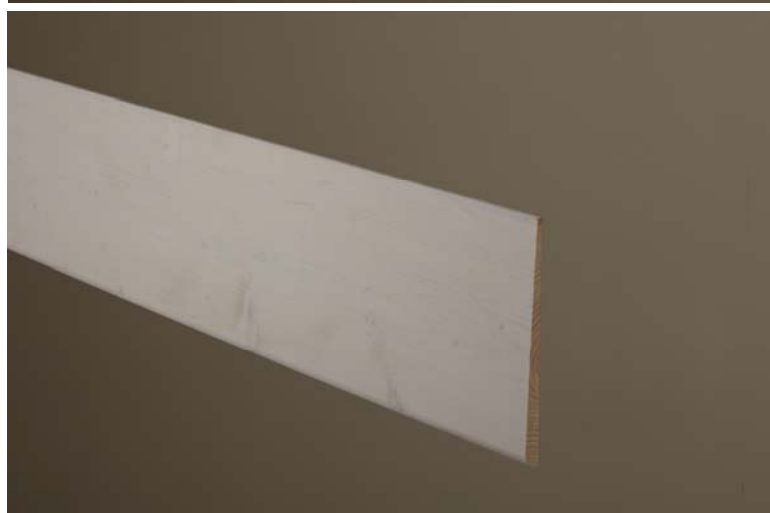

Luvia Primed
Round Edge 225mm
Order Code:
WWRP225

Weatherboard Accessories


Architraves and Stops



Permapine H3 Primed
External Stop
56x30
Order Code
R3PFJD3056



Permapine H3 Primed
Internal Stop
30x30
Order Code
R3PFJD3030

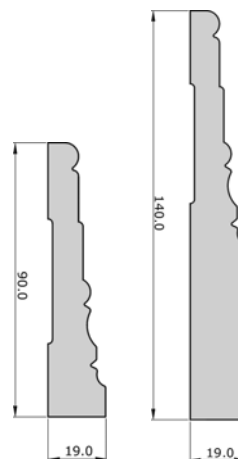

Permapine H3
Exterior Architrave
CCA H3
140x19
90x19
Order Codes
On request



Luvia Weatherboard Profiles

TECHNICAL STUFF

Timber Species	Nordic Whitewood <i>Picea Abies</i>
Moisture Content	16% (+-2%)
Certification	Sourced from PEFC forests and processors
Treatment	Where applicable the following applications have been applied Teknos Gori 356 ic 50 g/m ² EN 599-1, fungi, insects and termites NWPC Use Class 3 Wood above ground weather exposed;
Coating	Primer 100% alkyd-exterior elastomeric cladding primer.
Quality	NTC A (Non structural) NTC B/C (Non structural)
Approvals	FCBA (CTB-P+ approved efficient for wood decaying fungi, wood insects and termites) GORI 356 IC is comprised by the announcement of the Danish Ministry of Environment on Pesticides. DK: Træbeskyttelsesmiddel nr. 417-9 FR: CTB P+ N° de Certificat 57-3261-57 UK: HSE No. 7769

Luvia Weatherboards

NEED TO KNOW

TEKNOS PRESERVATION

Teknos Gori 356IC brand preservative system is based on an effective combination of propiconazole, tebuconazole, 3-Iodo-2-propynyl-butyl-carbamate and cypermethrine organic co-biocides. Such systems have provided proven performance in protection against fungi, insects and termites. Furthermore the wood becomes more dimensionally stable. Gori 356IC timber is flow treated allowing deep absorption into the wood structure providing protection where it matters. Wood treated in this way is suitable for Use Classes UC1, UC2, and UC3 including cladding, doors and windows.

INSTALLATION AND CARE

All timber products continue to move with changes in local weather conditions and aspect. Weatherboard profiles are lapped allowing the boards to move freely with changes in local conditions over the life of the product.

A top coat must be applied prior to installation. All cut ends must be treated or painted during installation.

All timber products should be treated in their final shape and form. Any surface exposed by drilling or cutting must be re-treated with a suitable cut end preservative (Protim® Reseal preservative, or similar is recommended). Failure to re-treat may negate the value of the preservative and is a requirement of the guarantee. Rip sawing, thicknessing and planing are not permitted unless the timber is subsequently re-treated to the original specification.

Consult the Cladding and Weatherboard Installation Guide prior to installation available at:
www.wrightforestproducts.com.au

BACKED IN AUSTRALIA BY WRIGHT FOREST –15 YEAR IN-SERVICE LIFE LIMITED GUARANTEE

Wright Forest is a product innovation company with 160 years of experience in timber and is backed by the most respected timber and chemical manufacturers in Europe. Luvia products have undergone over ten years of development in Australia alone. This product has a limited guarantee to meet in-service life of 15 years.

DISCLAIMER

The information provided herein is correct at time of publication. Specifications or details may change from time to time without notice. Please consult your building products supplier for further information. Technical literature and MSDS are available from www.wrightforestproducts.com.au

* Consult the MSDS and Installation Guide prior to purchase or installation.

Manufactured by Luvian Saha Oy, Luvia Finland for Wright Forest Products Pty Ltd

Available from: