

Waterhog[™] Fashion No. 280 - Entrance Mat

Features and Benefits

- Waterhog[™] Fashion is an exceptionally durable, long lasting mat with outstanding performance capabilities.
- Designed for added beauty, Waterhog[™] Fashion's border is constructed of the same 100% premium polypropylene fibre system as the mats surface giving an attractive look that is easy to maintain.
- This tough as nails mat is the perfect choice for decorative indoor areas such as offices, restaurants, retail stores or anywhere you want to put your best foot forward.
- Waterhog[™] Fashion is anti-static, maximum average voltage of 1.6KV. Safe for use in computer rooms and around electronic equipment.
- Green friendly rubber backing has 20% recycled rubber content.
- All Waterhog mats are certified slip resistant by the National Floor Safety Institute
- Tested by CSIRO

Construction Details

A: Unique ridged construction effectively removes and traps dirt and moisture.

B: Exclusive rubber-reinforced face nubs prevent pile from crushing, extending product life.

C: Anti-static 100% premium polypropylene. Fabric dries quickly; won't fade or rot. Can easily be vacuumed or hosed out.

D: Waterhog[™] Fashion's highly durable, attractive fabric border makes it the perfect choice for indoor or outdoor applications.

E: Special gripper rubber backing minimises movement on carpets and hard surfaces.

F: Exclusive "water dam" allows Waterhog[™] Fashion to trap dirt and water so they stay in the mat and off your floor - minimising the slip hazards and floor damage around the perimeter of the mat.

Note: Colours subject to change from dye lot to dye lot.

Video: Waterhog[™] Sand and Water Demonstration

[Click here to view a Windows Media Video file](#)

Mat Specifications

Uses: Entrance areas

Compound: Yarn: Solution-dyed polypropylene, Backing: SBR Rubber

Durometer: 55 per ASTM D2240

Thickness: 10mm

Edges: Safety bevelled on all four sides

Flammability: "A" Rating of DOC FF1-70

Warranty: 3 years

Colours: Bluestone, Charcoal, Dark Brown, Evergreen, Red/Black

Please advise if the matting is for a recess. All recess matting will be supplied **OVERSIZED** to enable you to cut into the existing frame.




Custom



Custom widths and unique configurations are available. Please call for a quotation.

Tested by CSIRO.

The test results are available ([Click here](#)). Wet Pendulum Test/Dry Floor Friction Test - AS/NZS4586:199

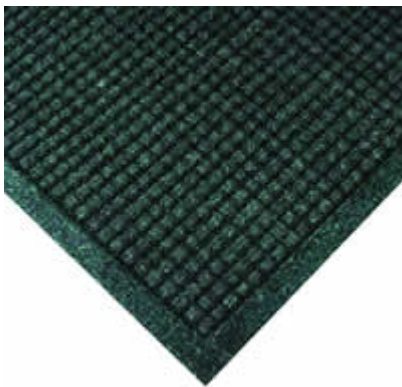

Mat Stock Sizes*

600mm x 900mm

900mm x 1500mm

1200mm x 1800mm

Per metre cut to length

x 1200mm or 1800mm wide

(* Sizes are approximate only.)

