

FOLDING CLOSURE

KRGS

ROLLER GRILLES
AND SHUTTERS

A DOOR DESIGN WITH YOU IN MIND



Unobtrusive
Easy to use
Quality & Strength

Retail, Commercial, suitable for both internal and external use. Especially suited for large openings where a complete open area is desired.

FOLDING CLOSURE

APPLICATION SHOPPING CENTRES, SHOP FRONTS, CLUB AND HOTEL BARS, COUNTER TOPS, KIOSKS, ARCADES, SERVERIES AND DOORWAYS

Architectural Specification SUPPLY AND INSTALL FOLDING CLOSURE MANUFACTURED BY KRGS ROLLER GRILLES AND SHUTTERS 02 **9519 7822**

SPECIFICATIONS

KRGS Folding Closures are available in the standard 300mm width panel and also in a 200mm panel, to provide versatility in shopfront design.

Track is to be constructed from sturdy extruded aluminium 35mm wide by 38mm high, curved track can be supplied with a 600mm (to the centre of the track) standard radius. Special radiuses are available on request. The track has a unique joining pin system to ensure smooth operation of the closure.

Curtain The curtain is constructed of low friction continuous hinged panels in sections of around 2800mm each, these are interlocked and secured on to the locking posts at each end, and sections are then joined via a unique intermediate post system which has bottom only locking to secure it. The panels are in filled with a choice of glass, polycarbonate or perforated vision mesh.

Locking is via a key system which throws a steel rod up through the top track and also one down into a dust proof floor socket that is drilled into the floor. Key Operation is from both inside and out. Multiple doors can also be keyed alike.

Egress a simple emergency egress door can be incorporated into any closed folding closure that has a minimum height of 2250mm, operatable with interior thumb turn or single down action handle, panels to swing outwards to create a clear opening of 915mm by 2140mm please consult a KRGS Technician for more info and optional pricing.







Weight and Stacking Door weights are approximately 14 kg/m². Depth of stacking is calculated as follows: 63mm per lineal metre of closure + 83mm for each vertical locking post. A simpler method is to calculate 12% of the total width for the 300mm panel and 16% for the 200mm panel. Always consult a KRGS Technician for accurate stacking details.

Operation All folding closures are manual operation, and can be operated with ease by even the most diminutive staff. The closure is designed so that all modes of operation and locking are at the user standing level.

Finish Clear anodised is the standard, whilst Dulux powder coat range is available as an optional extra.

Warranty A 12 month warranty against defective materials and workmanship applies.


NOTE: KRGS ROLLER GRILLES AND SHUTTERS HAS A CONTINUOUS PROGRAM OF DEVELOPMENT SIZES OR CONFIGURATION OF PRODUCT MAY CHANGE AT ANY TIME. FOR THE LATEST IN DESIGN AND SPECIFICATION PLEASE CONSULT WITH KRGS BY CALLING US.

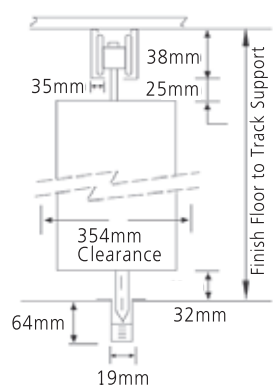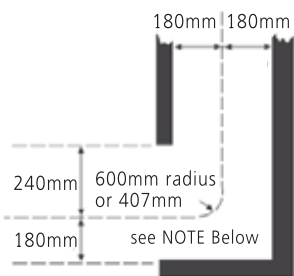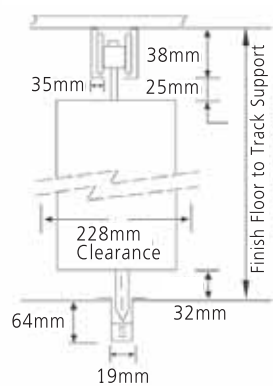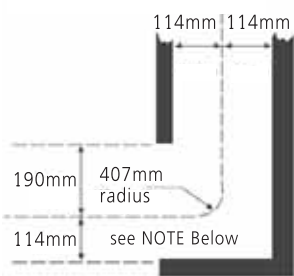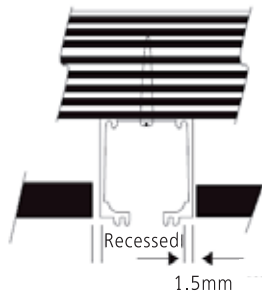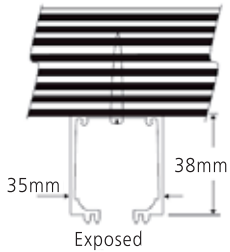

NOTE : These measurements subject to change, Please consult Kings Doors prior to finalising radius and distance from centre tracks.



Also available in open air grille >

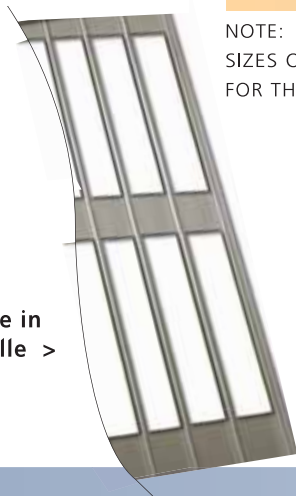

Sydney Unit 6 / 1 Canal Road St Peters NSW 2044
Phone 02 9519 7822 1800 897 822
Fax 02 9519 8922
Email clayton@krgsdoors.com.au
Web www.krgsdoors.com.au

Melbourne 116 Wedgwood Rd, Hallam VIC 3803 Phone 03 9796 5899

Brisbane Unit 15 / 315 Archerfield Road Richlands QLD 4077
Phone 07 3375 5855
Fax 07 3375 3070

KRGS
ROLLER GRILLES
AND SHUTTERS

A DOOR DESIGN WITH YOU IN MIND