





## Well-formed reliability

- Also available in maxi size
- Anti-glare feature with <17 UGR
- Interchangeable optical system
- Dimmability options include Phase-Cut & DSI/DALI
- 28W variations also approved under the VEET and IPART Scheme

## Product info

System Lumen Range	1250lm — 2650lm
System Power	20W, 28W
Forward Current	500mA, 700mA
System Efficacy Range	63lm/W to 95lm/W
Input Voltage	240V
Body/Trim Colour	Black, White
Installation Method	3-Circuit Track Mounted, Surface Mounted, Adjustable Recessed
LED Brand	Citizen
IP Rating	IP20
Diffuser	Clear
Dimming Type	Non-Dimmable, Phase-Cut Dimmable, DALI/DSI Dimmable
Maximum Tilt Angle	90°
Maximum Rotation Angle	350°
Accessories	Without Accessory, Honeycomb Louvre, Barn Doors
Warranty	5 years (T&C apply)
VEET/IPART Approved	Venice Mini 700mA

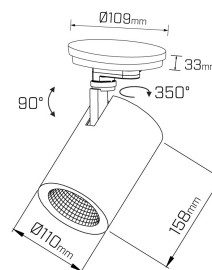

## Photometric info

Colour Rendering Index (CRI)	CRI90
Colour Temperature (CCT)	3000K, 3000K Vivid, 3500K, 3500K Vivid, 4000K, 4000K Vivid
Beam Angle	14°, 20°, 40°
Light Output Ratio (LOR)	100
Unified Glare Rating (UGR)	<UGR17
Revit Files	Please choose Beam Angle / Power within the Revit file

## Compliance

RoHS

CE



IPART




## Packaging


Box Weight	1.15kg
Box Dimensions L x W x H mm	130 mm x 130 mm x 310 mm
Boxes per Carton	15
Carton Dimensions L x W x H mm	665 mm x 405 mm x 280 mm

## Polar distribution diagrams

Venice Mini 14°

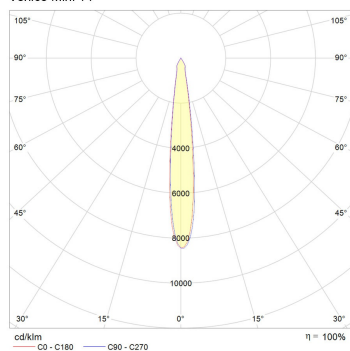

Venice Mini 21°

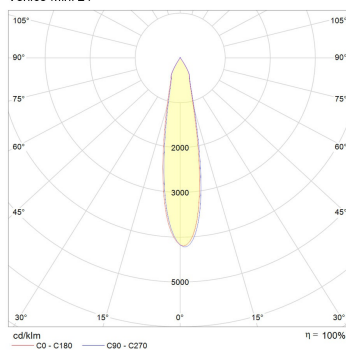

Venice Mini 43°

