

FINE FISSURED AND FINE FISSURED HIGH ACOUSTIC




FINE FISSURED Square Edge with PeakForm Prelude XL 24mm Exposed Tee grid

BENEFITS

- Total Acoustics Performance (NRC+CAC)
 - High sound absorption for reduced reverberation and quieter spaces
 - High sound attenuation, improving room to room privacy
- Cost effective ceiling solution
- Reliable, proven performance
- High light reflective finish
- RH99 Humidity Resistant
- Sustainable – Green Star contribution

APPLICATION AREAS

- Offices
- Education
- Healthcare
- Corridors
- Libraries

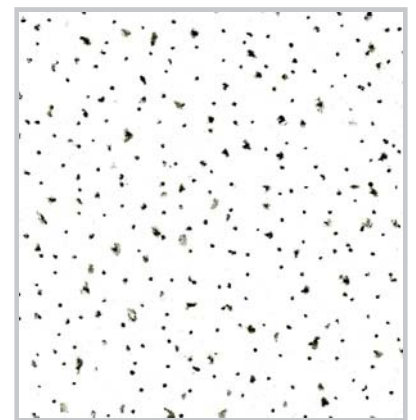

Inspiring Great Spaces

Armstrong[®]
CEILING SOLUTIONS

FINE FISSURED AND FINE FISSURED HIGH ACOUSTIC



RH99
Humidity
Resistant



Up to
56%
Recycled Content
EN ISO 14021



85%
Light Reflectance



Acoustical
Comfort



Total
Acoustics

| Panel Options | SQUARE LAY-IN | ANGLED TEGULAR | BEVELLED TEGULAR |
|------------------------------------|-----------------------|-----------------------|---|
| | Prelude 24mm Grid | Prelude 24mm Grid | Suprafine 15mm Grid Silhouette 15mm Grid |
| Fine Fissured | | | |
| 48 x 24 x 5/8in | 1730 | * | * |
| 600 x 600 x 15mm | 3510 | 3572 | 3577 |
| 1200 x 600 x 15mm | 3570 | 3574 | * |
| Fine Fissured High Acoustic | | | |
| 600 x 600 x 19mm | 4120 | 4122 | * |
| 1200 x 600 x 19mm | 4121 | 4123 | * |
| 1200 x 600 x 19mm | 1714AMEX | * | * |

* Special item on request. Other sizes and profiles, including K2C2 edge for semi-concealed grid systems upon request.



NRC: 0.60 (Fine Fissured)
0.70 (Fine Fissured High Acoustic)



CAC: 33 (Fine Fissured Square Lay In)
35 (Fine Fissured Tegular Edge)
35 (Fine Fissured High Acoustic)
40 (Fine Fissured High Acoustic 1714AMEX)



RH99% at 0°C – 49°C



Conforms with BCA Spec. C1.10 and tested to AS/NZS 3837:1998
– Group 1, ISO 5660 – Group 1 –S



Thermal Insulation (R- Value)
0.26 m²/K/W (Fine Fissured)
0.40 m²/K/W (Fine Fissured High Acoustic)



3 kg/m² (items: 1730, 1734, 3510, 3570-3574)
5.3 kg/m² (items 4120-4123)
6.1 kg/m² (item 1714AMEX)

Material

Wet-formed mineral fibre

Surface Finish

Factory-applied vinyl latex paint with painted "BioBlock™" mould/mildew inhibitor"

Backloading Recommendation

Contact your local Armstrong representative

Recycled Content

26% for items: 1730, 1734, 3510, 3570-3574, 47% for items: 4120-4123, 56% for item 1714AMEX. Note: 51% for Items 3510ATV and 3570ATV

Suspension Systems

PeakForm Steel options above, with 'Blue Tongue' Aluminium upon request

Green Star: Potential contribution

| MAN | | IEQ | | | ENE | | MAT and Mat. Calc. | | | |
|------------------|-----------------|--------------|-----------|--------|----------------------------------|---------------------------|---------------------|------------------|------------------|--|
| Waste Management | Daylight Factor | Noise Levels | Emissions | Energy | Modular & Design for Disassembly | Level A Certified Product | Product Stewardship | EMS to ISO 14001 | Recycled Content | |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |



Armstrong World Industries Pty Ltd
www.armstrongceilings.com.au

NSW
Telephone (02) 9748 1588

VIC/TAS
Telephone (03) 8706 4000

QLD/NT
Telephone (07) 3809 5565

Email: scentre@armstrongceilings.com

©2017 Armstrong World Industries Pty Ltd

AWP0417

Printed on Zanders Mega Recycled paper

Inspiring Great Spaces

Armstrong[®]
CEILING SOLUTIONS