




WOVEN IMAGE®

DESIGN DEPARTMENT - PRODUCT SPECIFICATION SHEET

ISSUE DATE: 31.1.19

---

DESIGN NAME	Vee
DESIGNER:	Woven Image
ORIGIN:	Australia
COLOURS:	15 (500/908/454/402/101/442/444/542/276/365/ 330/338/551/381/295)
QUANTITY:	10 tiles per box
COMPOSITION:	100% PET (60% recycled)
DIMENSIONS:	550mm (+/- 2mm) x 550mm (+/- 2mm)
WEIGHT:	2400gsm (+/-10%)
THICKNESS:	12mm (+/- 7%)
COVERAGE:	3.025 sqm per box
PATTERN:	See <a href="http://wovenimage.com">wovenimage.com</a> for additional information
SPECIALS:	Available on request

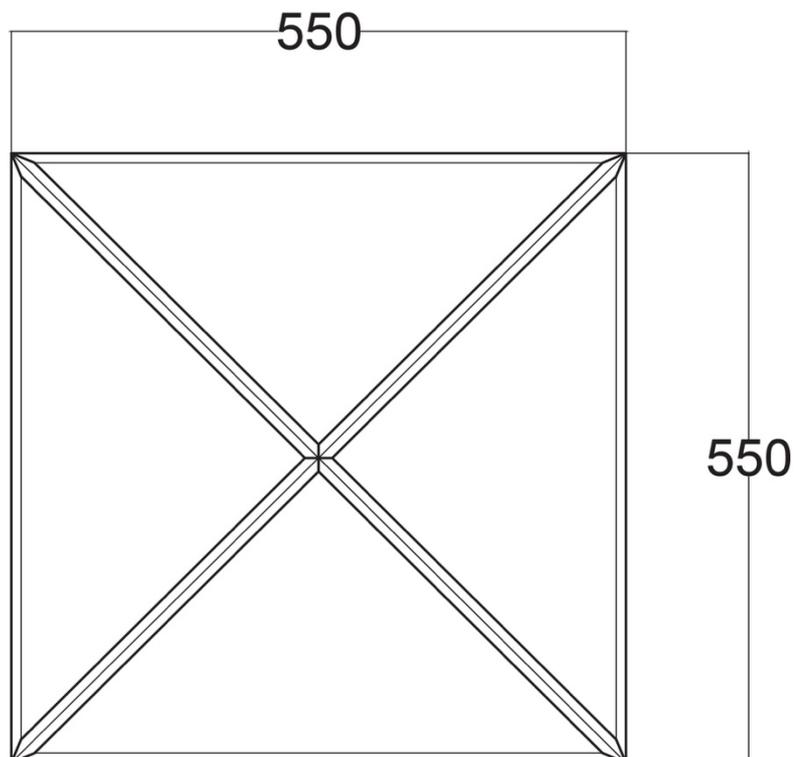

## **PERFORMANCE**

COLOUR FASTNESS TO LIGHT:

ISO 105-B02-1994 Rating: 6-7

FIRE TEST:

EchoPanel® 12mm achieves:  
ISO 9705: Group 1  
AS 1530.3  
GB8624 B1  
BS EN 13501.1: Classification B-s1, d0

FABRIC CARE:

See additional care guide.  
Blot excess spills from material quickly.  
Wipe with a damp cloth.  
Warning avoid excessive amounts of water.

SOUND ABSORPTION:

EchoPanel® 12mm achieves:  
AS ISO 354 – 2006  
NRC Value: 0.35 (with no air gap)

VOC EMISSIONS:

ASTM D5116 Rate: < 0.02 mg/m<sup>2</sup>/hr (7 days)



ENVIRONMENTAL:

EchoPanel® achieves GreenTag Certification GreenRate:  
Level A.

INSTALLATION:

Prior to installation, ensure the surface area  
to which the tiles are going to be fixed is  
smooth, clean and free from dust or any other  
contaminants that may impede the installation.

USE:

